



## ENGINE

Make	FPT
Model	F2CFE614F
Emissions Certification	Tier 4 Final
Emissions Technology	SCR/DOC
Type	4-stroke, turbocharged and air-to-air cooler
Cylinders	6-cylinder in-line
Bore/Stroke	4.61 x 5.31 in (117 x 135 mm)
Displacement	531 in <sup>3</sup> (8.7 L)
Fuel	#2 Diesel, #1 and #2 mixture permitted for cold temperatures
Fuel injection	Direct injection – electronic
Fuel filter	Replaceable, full flow spin-on cartridge
Fuel pump	Bosch CP 3.3
Gradeability:	
Side-to-side	35°
Fore and aft	35°
Air filter	2-element dry type w/ warning restriction indicator
Rear-mount cooling module w/ auto reversing fan:	
Rear-mount air/water w/ Lube Oil Cooler	
Fan – hydraulic driven:	
Style	9 blade puller
Diameter	36 in (914 mm)
Water pump	Integral
Engine oil pump operating angle ratings:	
Side-to-side	35°
Fore and aft	35°
Oil filtration	Replaceable, full flow spin-on cartridge
Engine speeds	RPM
Rated – full load	2100
Horsepower – Maximum Power:	
Peak gross @ 1800 RPM	345 hp (257 kW)
Net rated @ 2100 RPM	293 hp (218 kW)
Peak net @ 1800 RPM	329 hp (245 kW)

Torque – Maximum Power:	
Gross @ 1100 RPM	1,183 lb-ft (1 604 N-m)
Net @ 1100 RPM	1,154 lb-ft (1 564 N-m)

Net torque rise:	
Maximum power range	57%

NOTE: Gross horsepower and torque per SAE J1995.  
Net horsepower and torque per SAE J1349.

## DRIVETRAIN

Transmission:	
4F/3R Proportional w/ Electronic Control	
Module torque sensing autoshift/manual shift and modulation	
Gears	Helical cut
Gear ratios	Forward/Reverse
1st	3.731/3.731
2nd	2.207/2.207
3rd	1.421/0.970
4th	0.625/ —
Torque converter:	
Stall ratio	2.511:1
Differential:	
Front axle equipped w/ locking differential	
Rear axle equipped w/ open differential	
Rear axle oscillation	26° total
Front and rear axles:	
Differential ratio	4.25
Planetary ratio	6.35
Final axle ratio	27.00
Special application axles – standard:	
Front axle equipped w/ locking differential	
Rear axle equipped w/ open differential	
Planetaries	Outboard
Service brakes:	
Hydraulically actuated, maintenance-free, multiple wet disc w/ accumulator to all four wheels	
Brake surface area:	
Front hub – each	1,144 in <sup>2</sup> (0.738 m <sup>2</sup> )
Rear hub – each	1,144 in <sup>2</sup> (0.738 m <sup>2</sup> )
Parking brakes:	
Spring-applied hydraulic release disc on transmission output shaft neutralizes power flow to wheels when engaged	
Travel speeds – 4-speed transmission:	
	Forward Reverse
	mph (kph) mph (kph)
1st	4.3 (6.9) 4.3 (6.9)
2nd	7.2 (11.6) 7.2 (11.6)
3rd	11.0 (17.7) 15.8 (25.5)
4th	23.2 (37.4) —
NOTE: Travel speeds at full engine throttle w/ 26.5 x 25 L3 Radial tires.	

## ELECTRICAL

Voltage	24 Volts, negative ground
Alternator	120 amp
Batteries (2)	12-volt

## OPERATOR ENVIRONMENT

ROPS cab AC w/ heat; 8" LCD touchscreen display, adjustable armrest w/ 3 configurable buttons; Key start; Articulated power steering w/ tilt column; Fully adjustable, heated air-ride seat w/ head rest; AM/FM Bluetooth radio w/ auxiliary input; Cab convenience package: rear sun shade, interior mirror, under the seat drawer, 12V

# 1121G

EFFECTIVE APRIL 2021  
Z-BAR/XR WHEEL LOADER  
TIER 4 FINAL CERTIFIED

accessory port, & coat hook; Foot throttle; Single lever (joystick) loader control w/ fully adjustable wrist rest, 2 cup holders; 2 interior rear view mirrors; 3 inch (76 mm) retractable seat belt; Integrated 4-corner strobe; Multiple storage trays; Single brake pedal; F/N/R shuttle switch; Left and Right external rear view mirrors; Sound suppression kit; Pressurized air filtering; Anti-glare window strip; Front and Rear Defroster; Side window, partial/fully open; 2 Dome lights; Wipers, rear and intermittent front; Windshield washers, front and rear; Rubber floor mat; Horn.

### Displays/Gauges:

#### Digital:

Transmission oil temperature; Engine coolant temperature; Fuel level; DEF level.

#### LCD screen:

Hour meter; Time; FNR indication; Trip computer; Metric/english; Differential lock; Engine speed; Automatic trans indication; DeClutch indication; Fuel consumption; Engine diagnostics; Error reporting; Travel speed; Current gear selection; Engine mode indication; Multiple languages; Transmission diagnostics.

### Audible/Visual alarms:

#### Warning lights:

Four-way flashers; High beam lights; Engine block heater; Low brake pressure; Parking brake.

#### Caution warnings:

Parking brake; Coolant temperature; Hydraulic oil temperature; Transmission oil temperature; Air filter; Transmission filter; Hydraulic filter; Alternator; Low fuel.

#### Critical warnings:

Engine oil pressure; Brake pressure; Steering pressure – w/ aux. steering\*; Coolant temperature; Hydraulic oil temperature; Transmission oil temperature.

#### Backup alarm

#### Maintenance reminders:

Cab air filter; Engine oil filter; Fuel pre-filter; DEF tank vent filter; SCR supply filter; Hydraulic oil and filter; Engine air filter; Engine coolant; Drive belt; Cab recirculation filter; Engine breather filter; Transmission breather; Front and rear axle fluid; SCR supply module filter.

NOTE: \*If equipped w/ option.

## OPERATING WEIGHT

### Z-Bar

Unit equipped w/ ROPS cab w/ heater and A/C; Standard counterweight; 26.5-R25 L3 Radial Tires; 6.25 yd<sup>3</sup> (4.8 m<sup>3</sup>) GP pin-on w/ bolt on edge; Full fuel; 165 lb (75 kg) operator; 61,650 lb (27 964 kg)

### XR

Unit equipped w/ ROPS cab w/ heater and A/C; Standard counterweight; 26.5-R25 L3 Radial Tires; 6.25 yd<sup>3</sup> (4.8 m<sup>3</sup>) HD pin-on w/ bolt on edge; Full fuel; 165 lb (75 kg) operator; 63,443 lb (28 777 kg)

## HYDRAULICS

Main pumps – steering/implement:

Closed center pressure/flow compensated

Tandem variable displacement – load-sensing

Max rated flow x2: 50.2 gpm @ 2000 RPM  
(190 L/min @ 2000 RPM)

Loader control valve:

Closed-center, sectional 2, 3 or 4-function  
w/ control for lift, tilt and auxiliary hydraulics

Loader auxiliary steering:

Hydraulic orbital center-pivot articulating  
w/ on-demand oil flow

High pressure standby:

Implement 3,650 psi (25 165 kPa)  
Steering 3,495 psi (24 097 kPa)

Filtration:

Filtered vent w/ relief on hydraulic reservoir,  
maintains 3-5 psi on reservoir, 10-micron,  
return filter furnishes only clean oil to all  
components of the system

## SERVICE CAPACITIES

Fuel tank 125 gal (473.0 L)

DEF tank – Diesel Exhaust Fluid:

Usable capacity 16 gal (61.0 L)  
Total 24 gal (90.8 L)

Hydraulic system:

Reservoir 35.4 gal (134.0 L)  
Total 66.0 gal (250.0 L)

Transmission:

Service w/ filter 48.0 qt (45.4 L)

Front and rear axle:

Front axle 67.6 qt (64.0 L)  
Rear axle 67.6 qt (64.0 L)

Engine oil w/ filter 30 qt (28.5 L)

Cooling system 15 gal (56.8 L)

## OTHER SPECIFICATIONS

Lift cylinder:

Bore diameter 7.00 in (177.8 mm)  
Rod diameter 4.50 in (114.3 mm)  
Stroke 34.48 in (875.8 mm)

Dump cylinder:

Bore diameter 8.00 in (203.2 mm)  
Rod diameter 5.00 in (127.0 mm)  
Stroke 27.35 in (694.7 mm)

Loader:

Z-Bar loader linkage; Single control for  
lift and tilt; Positive hold float; Automatic  
return-to-dig; Automatic height control;  
Automatic return-to-travel; Brake pedal  
transmission disconnect; Bucket position  
indicator on bucket.


Cycle time:

Raise w/ rated bucket load 6.5 sec  
Dump w/ rated bucket load 1.4 sec  
Float down 2.8 sec

Sound level in Cab (LpA) 69 dB(A)

Exterior sound level (LwA) 104 dB(A)

NOTE: Sound level data tested in accordance  
with ISO6395, 6396, 3744.

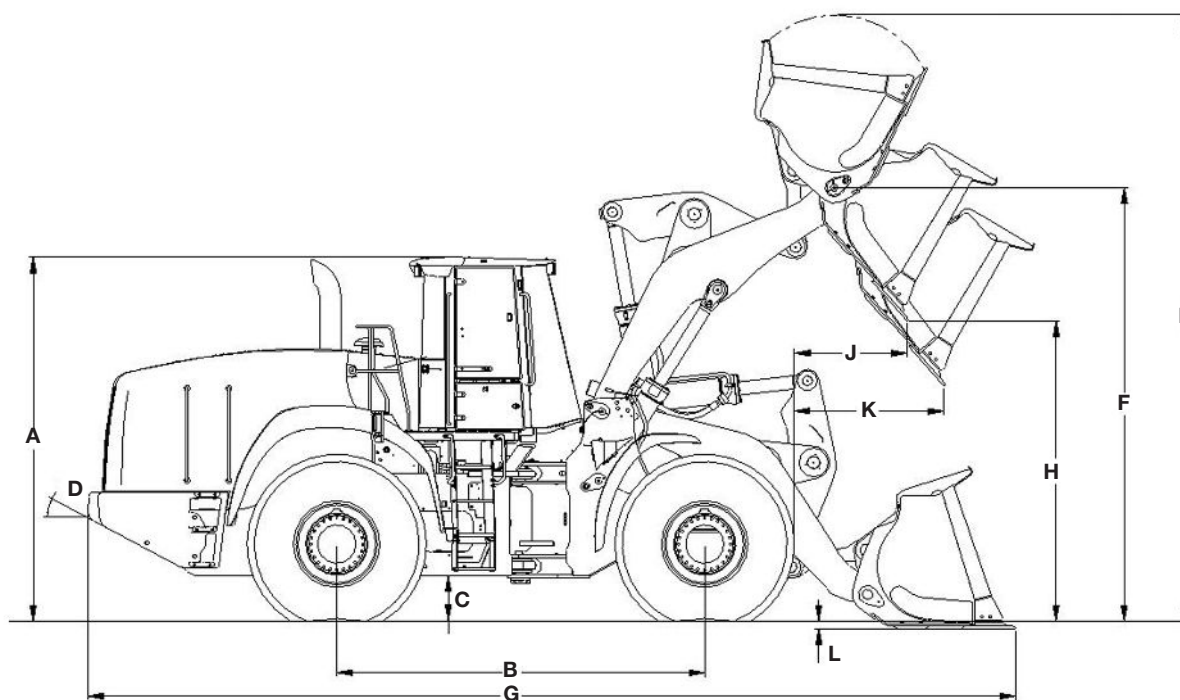

Line drawings are for illustrative purpose only and may not be exact representation of unit.

## DIMENSIONS

<b>A.</b> Height to top of ROPS cab	140.8 in (3 576 mm)
Height to drawbar	44.8 in (1 137 mm)
<b>B.</b> Wheelbase	139.8 in (3 550 mm)
<b>C.</b> Ground clearance	17.2 in (437 mm)
<b>D.</b> Angle of departure, rear	23°
Width:	
Overall* without bucket	117.2 in (2 978 mm)
Tread width	90.6 in (2 300 mm)
Turning radius* – outside	250.6 in (6 366 mm)
Turning angle:	
From center	40°
Total angle	80°
Rear axle oscillation – total	26°

NOTE: \*Dimensions taken with 26.5-R25 L3 Radial Tires. Additional dimensions on pages 4 through 5.

## WEIGHT ADJUSTMENTS

Select Options	Weight Adjustment	Tipping Load Adjustment Straight: Deflected*	Tipping Load Adjustment 40° Turn: Deflected*
26.5 x 25 L5 Radial Tires	+1,500 lb (+680 kg)	+1,323 lb (+600 kg)	+1,226 lb (+556 kg)

NOTE: Unit equipped with Z-Bar loader arms, 6.25 yd<sup>3</sup> (4.8 m<sup>3</sup>) pin on bucket w/ bolt-on edge, 26.5-R25 L3 Radial Tires, ROPS cab with heater and A/C, full counterweight, front and rear fenders, full fuel and 165 lb (75 kg) operator. Adjust select options from rated weight.

\*Tipping loads: ISO 14397-1 Deflected Tires.

## PERFORMANCE SPECS

1121G Z-Bar*		6.25 yd <sup>3</sup> (4.8 m <sup>3</sup> ) Bucket with Bolt-on Edge - Pin On	6.1 yd <sup>3</sup> (4.7 m <sup>3</sup> ) Bucket with Teeth - Pin On
Operating weight		61,650 lb (27 964 kg)	61,646 lb (27 962 kg)
E.	Operating height – fully raised with spillguard	242.0 in (6 147 mm)	242.0 in (6 147 mm)
F.	Hinge pin height – fully raised	175.2 in (4 449 mm)	175.2 in (4 449 mm)
G.	Overall length – bucket level on ground	361.1 in (9 172 mm)	368.3 in (9 354 mm)
Dump angle – fully raised		50°	50°
H.	Dump height – fully raised, 45° dump	126.3 in (3 209 mm)	121.7 in (3 090 mm)
J.	Bucket reach – fully raised, 45° dump	50.1 in (1 273 mm)	55.4 in (1 406 mm)
K.	Bucket reach – 7 ft 0 in (2.13 m) height, 45° dump	80.4 in (2 043 mm)	83.5 in (2 121 mm)
L.	Dig depth	4.4 in (111 mm)	4.6 in (116 mm)
Operating load – ISO Rigid Tires		21,032 lb (9 540 kg)	21,166 lb (9 601 kg)
Operating load – ISO Deflected Tires		19,227 lb (8 721 kg)	19,345 lb (8 775 kg)
Maximum material density – ISO Rigid Tires		3,365 lb/yd <sup>3</sup> (1 997 kg/m <sup>3</sup> )	3,470 lb/yd <sup>3</sup> (2 059 kg/m <sup>3</sup> )
Maximum material density – ISO Deflected Tires		3,076 lb/yd <sup>3</sup> (1 825 kg/m <sup>3</sup> )	3,171 lb/yd <sup>3</sup> (1 882 kg/m <sup>3</sup> )
Tipping load – ISO Rigid Tires:	Straight	51,898 lb (23 541 kg)	52,231 lb (23 692 kg)
	40° turn	42,064 lb (19 080 kg)	42,331 lb (19 201 kg)
Tipping load – ISO Deflected Tires:	Straight	48,670 lb (22 076 kg)	48,973 lb (22 214 kg)
	40° turn	38,454 lb (17 443 kg)	38,691 lb (17 550 kg)
Lift capacity:	Full height	32,710 lb (14 837 kg)	32,662 lb (14 815 kg)
	Ground	56,904 lb (25 811 kg)	57,397 lb (26 035 kg)
Breakout force with tilt cylinder		49,934 lb (22 650 kg)	53,151 lb (24 109 kg)
Loader clearance circle with bucket		564.4 in (14 337 mm)	569.6 in (14 467 mm)

1121G XR		6.25 yd <sup>3</sup> (4.8 m <sup>3</sup> ) Bucket with Bolt-on Edge - Pin On	6.1 yd <sup>3</sup> (4.7 m <sup>3</sup> ) Bucket with Teeth - Pin On
Operating weight		63,443 lb (28 777 kg)	63,439 lb (28 776 kg)
E.	Operating height – fully raised with spillguard	258.4 in (6 564 mm)	258.4 in (6 564 mm)
F.	Hinge pin height – fully raised	191.6 in (4 867 mm)	191.6 in (4 867 mm)
G.	Overall length – bucket level on ground	377.2 in (9 580 mm)	384.3 in (9 761 mm)
Dump angle – fully raised		50°	50°
H.	Dump height – fully raised, 45° dump	142.8 in (3 626 mm)	138.1 in (3 508 mm)
J.	Bucket reach – fully raised, 45° dump	51.8 in (1 315 mm)	57.1 in (1 449 mm)
K.	Bucket reach – 7 ft 0 in (2.13 m) height, 45° dump	95.2 in (2 417 mm)	98.5 in (2 502 mm)
L.	Dig depth	4.4 in (111 mm)	4.6 in (116 mm)
Operating load – ISO Rigid Tires		18,264 lb (8 284 kg)	18,375 lb (8 335 kg)
Operating load – ISO Deflected Tires		17,204 lb (7 804 kg)	17,303 lb (7 848 kg)
Maximum material density – ISO Rigid Tires		2,922 lb/yd <sup>3</sup> (1 734 kg/m <sup>3</sup> )	3,012 lb/yd <sup>3</sup> (1 787 kg/m <sup>3</sup> )
Maximum material density – ISO Deflected Tires		2,753 lb/yd <sup>3</sup> (1 633 kg/m <sup>3</sup> )	2,837 lb/yd <sup>3</sup> (1 683 kg/m <sup>3</sup> )
Tipping load – ISO Rigid Tires:	Straight	44,370 lb (20 126 kg)	44,652 lb (20 245 kg)
	40° turn	36,527 lb (16 568 kg)	36,750 lb (16 670 kg)
Tipping load – ISO Deflected Tires:	Straight	42,640 lb (19 341 kg)	42,899 lb (19 459 kg)
	40° turn	34,408 lb (15 607 kg)	34,606 lb (15 697 kg)
Lift capacity:	Full height	31,251 lb (14 175 kg)	31,218 lb (14 160 kg)
	Ground	47,783 lb (21 674 kg)	48,157 lb (21 844 kg)
Breakout force with tilt cylinder		50,409 lb (22 865 kg)	53,667 lb (24 343 kg)
Loader clearance circle with bucket		580.9 in (14 756 mm)	586.6 in (14 900 mm)

1121G		Z-Bar/XR	Z-Bar/XR
Maximum rollback:	Ground	44°/42°	45°/42°
	Carry position	49°/48°	49°/48°
	@ Full height	65°/66°	65°/66°
Maximum grading angle with bucket – back dragging		60°/62°	60°/62°
SAE bucket capacity – struck		5.45 yd <sup>3</sup> (4.17 m <sup>3</sup> )	5.25 yd <sup>3</sup> (4.01 m <sup>3</sup> )
	Heaped	6.25 yd <sup>3</sup> (4.78 m <sup>3</sup> )	6.10 yd <sup>3</sup> (4.66 m <sup>3</sup> )
Bucket width – outside		125.8 in (3 195 mm)	126.9 in (3 223 mm)
Bucket weight		4,941 lb (2 241 kg)	4,937 lb (2 240 kg)

NOTE: \*Z-Bar performance data shown w/ standard counterweight. Performance data unit equipped with 26.5-R25 L3 Radial tires, ROPS cab w/ heater and A/C, standard counterweight, full fuel and 165 lb (75 kg) operator. Specifications per SAE J732, J1234, J695, J742, and J818.

## STANDARD EQUIPMENT

### OPERATOR ENVIRONMENT

See page 1

### ENGINE

CASE/FPT F2CFE614F  
Tier 4 Final Certified  
Selective Catalytic Reduction (SCR) with Diesel Oxidation Catalyst  
Selectable work modes:  
    Maximum Mode  
    Smart Mode  
Automatic shutdown – idle reduction device  
Turbocharger  
Charge air cooling  
Automatic fan belt tensioner  
Integral engine oil cooling  
Fuel filter with water trap  
Dual-element dry-type air cleaner  
Hydraulic-driven cooling fan  
Air-cooled radiator  
Rear-mounted cooling module with hydraulically driven auto-reversing fan  
Engine block heater  
Sound suppression kit  
Ejector type air precleaner  
Common rail electronic fuel injection

### LOADER

See page 2 – Operating weight,  
Other specifications

### DRIVETRAIN

4-wheel drive  
4F/3R Selectable autoshift/manual shift transmission  
Electronic Control Module – programmable, computer controlled proportional shifting with programmable gear selection  
Onboard diagnostics  
Heavy-duty axles with coolers:  
    With locking front differential and open/conventional rear differential  
Single lever electronic shift control  
F/N/R switch in loader control handle  
Downshift button  
Torque converter  
Outboard planetary axles  
Transmission oil cooler  
Brake pedal transmission disconnect  
Hydraulic wet disc brakes  
Spring-applied hydraulic release parking brake  
Limp-Home Mode  
Greaseable rear axle trunnion

### HYDRAULICS

Adjustable Electro-hydraulic – EH loader control with 3 configurable buttons  
Adjustable EH settings:  
    Smooth  
    Moderate  
    Aggressive  
Integrated Payload System  
Ride Control™  
EH Parallel Lift  
Low-effort steering  
Hydraulic driven fan  
8 Diagnostic quick couplers  
Split flange hydraulic connections – 1 inch or greater  
Hydraulic oil cooler

### ELECTRICAL

Battery isolator/electrical disconnect  
120 amp alternator and voltage regulator  
(2) 1000 CCA 12-volt batteries  
Electric starter  
Lights:  
    Integrated 4-corner strobe  
    Front and rear halogen flood lights  
    2 Front driving headlights – high/low beam  
    2 Front flood  
    2 Rear flood  
    2 LED stop and tail lights  
    Front and rear turn signal/flash  
Key start/stop switch  
Centrally located fuse box with all electrical circuits protected  
Backup alarm  
Remote jump start posts

### OTHER

Electric hood lift  
Front and rear fenders, partial coverage  
External rear view mirrors  
Standard counterweight  
Drawbar hitch  
Articulation locking bar  
Lift arm locking bar  
Lift and tie-down points – front/rear  
Backup alarm  
3-piece rims  
Rear frame side covers  
License plate brackets; front bracket and lit rear bracket  
Rubber steering stops  
Standard fenders with Left hand and Right hand steps  
Grouped remote-mounted ecology drains:  
    Engine oil  
    Engine coolant  
    Hydraulic oil

### TELEMATICS

CASE SiteWatch™ Telematics – includes hardware and a 3-yr Advanced data subscription  
SiteConnect Module provides remote diagnostics capability

## OPTIONAL EQUIPMENT

### OPERATOR ENVIRONMENT

Leather trimmed heated air seat with active suspension  
In cab powered cooler box  
In cab accessory mount  
Rear view camera  
External heated rear view mirrors  
Front LED driving/headlights  
LED front and rear work lights – 4 front, 2 rear

### DRIVETRAIN

Axle oscillation stops  
Cold weather package:  
Fuel heater  
Hydraulic oil cooler bypass  
Low temperature hydraulic oil

### HYDRAULICS

Auxiliary hydraulics  
Secondary steering  
Tire Pressure Monitoring System  
2-function EH loader control with one auxiliary function  
4-function EH loader control with two proportional auxiliary controls  
2 Single axis EH levers and one auxiliary function  
Joystick steering with or without secondary steering

### LOADER

XR extended reach version  
Attachment auxiliary hydraulics  
Buckets – see page 4

### TIRES

26.5 x 25 L3 Bias  
26.5-R25 L3 Radial  
26.5 x 25 L5 Bias  
26.5-R25 L5 Radial

### OTHER

12 mph (20 kph) maximum speed control  
Special paint  
Wide full coverage fenders with right and left hand steps

**CaseCE.com**

©2022 CNH Industrial America LLC. All rights reserved. CASE is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. CNH Industrial Capital is a trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Printed in U.S.A. Contains 10% post-consumer fiber.

IMPORTANT: CASE Construction Equipment Inc. reserves the right to change these specifications without notice and without incurring any obligation relating to such change. Availability of some models and equipment builds vary according to the country in which the equipment is used. The illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your CASE dealer/distributor will be able to give you details of the products and their specifications available in your area.



CASE Construction Equipment is biodiesel-friendly. NOTE: All engines meet current EPA emissions regulations. All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.



Always read the Operator's Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs and use any safety features provided.

Form No. CCE2022121121G  
Replaces Form No. CCE2021041121G