



ENGINE

Model	Isuzu AQ-6UZ1X Cooled EGR, SCR
Emissions Certification	Tier 4 Final
Fuel	Requires ultra-low sulfur fuel B5 biodiesel tolerant
Type	Water-cooled, 4-cycle, high pressure common rail system Turbocharger w/ air cooled intercooler, SCR system
Cylinders	6-cylinder in-line
Displacement	600 in ³ (9.8 L)
Bore/Stroke	4.72 x 5.71 in (120 x 145 mm)
Fuel injection	Direct injection – electronic
Fuel filter	Replaceable, full flow spin-on cartridge
Air filter	Dry type element w/ warning restriction indicator
Oil filter	Replaceable, full flow spin-on cartridge
Engine gradeability:	
Side-to-side	35°
Fore and aft	35°
Net horsepower – ISO 14396 @ 2000 RPM:	362 hp (270 kW)
Net horsepower – ISO 14396 @ 2000 RPM: w/ fan pump activated	329 hp (245 kW)
Net max. torque – ISO 14396 @ 1500 RPM:	1,005 lbf-ft (1 363 N-m)
Cooling operating range:	109° to -13° F (43° to -25° C)
Oil	Requires low-ash oil CJ-4

DRIVETRAIN

Travel control	Dual stage relief/ counter balance design
Brakes	Mechanical disc
Service brakes	SAHR disc – each motor
Two speed travel:	
Max. high speed	3.3 mph (5.3 kph)
Max. low speed	2.0 mph (3.2 kph)
Automatic downshift	
Drawbar pull	76,200 lbf (339 kN)
Gradeability	70% – 35° Slope

ELECTRICAL

Voltage	24 Volts
Alternator rating	50 amp
Batteries	2 x 12 Volt
Battery reserve capacity	128 Ah/5 hour
Work lights – 5 2 boom, 1 upper, 2 cab	24 Volt/70 watt

OPERATOR ENVIRONMENT

Air-conditioner output	18,100 BTU/hr
Heater output	20,150 BTU/hr
Sound level inside cab – ISO6395	71.0 dBA
Electrical outlet	12 Volt
Cab interior light	10 watt
Rear view camera	Standard
Seat	Heated, air-suspension

ATTACHMENT

Boom	22 ft 11 in (6 980 mm)
Arm options	11 ft 1 in (3 380 mm) 8 ft 4 in (2 530 mm) 13 ft 1 in (4 000 mm) 15 ft 11 in (4 850 mm)
Bucket digging force*	55,500 lbf (247 kN)
w/ Auto Power-Boost	60,700 lbf (270 kN)

NOTE: *Digging force ratings based on ISO6015.

OPERATING WEIGHT

Operating weight	109,300 lb (49 600 kg)
w/ shoes	2 ft 11 in (900 mm)
w/ boom	22 ft 11 in (6 980 mm)
w/ arm	11 ft 1 in (3 380 mm)
w/ bucket	33,731 lb (1 530 kg)
w/ counterweight	22,000 lb (10 000 kg)

NOTE: W/ operator/full fuel/standard equipment/
fixed sideframe undercarriage

GROUND PRESSURE

@ Standard operating weight 8.3 psi (0.57 bar)
w/ 35.4 in (900 mm) triple semi-grouser shoes

HYDRAULICS

System design	Open center
Main pumps	Two-variable displacement/ axial piston
Max. rated flow per pump:	96.2 gpm (364 L/min)
Max rated flow total:	192.3 gpm (728 L/min)
System pressures:	
Boom, arm and bucket	4,550 psi (314 bar)
w/ Power Boost	4,980 psi (343 bar)
Travel circuits	4,980 psi (343 bar)
Swing circuits	4,270 psi (294 bar)
Pilot pump	1 x gear design
Max. capacity	7.9 gpm (30.0 L/min)

Controls	w/ boom/arm holding valve
Right track travel, bucket, boom and arm acceleration.	1 x Four-spool section
Left track travel, auxiliary, swing, boom and arm acceleration.	1 x Five-spool section

Work mode selections	SP: Speed Priority H: Heavy-Duty A: Automatic
----------------------	---

Swing motor	Fixed displacement axial piston
Swing final drive	Planetary gear reduction
Travel motor	Two-speed independent travel/axial piston

HYDRAULIC CYLINDERS

Boom cylinders	Two (2)
Cylinder bore	6.7 in (170 mm)
Cylinder rod diameter	4.5 in (115 mm)
Cylinder stroke	61.0 in (1 550 mm)
Arm cylinder	One (1)
Cylinder bore	7.5 in (190 mm)
Cylinder rod diameter	5.1 in (130 mm)
Cylinder stroke	75.6 in (1 920 mm)
Bucket cylinder	One (1)
Cylinder bore	6.5 in (165 mm)
Cylinder rod diameter	4.5 in (115 mm)
Cylinder stroke	50.6 in (1 285 mm)


SERVICE CAPACITIES

Fuel tank	172 gal (650 L)
Hydraulic system	122 gal (460 L)
Hydraulic tank	61 gal (230 L)
Engine oil w/ filter	10.8 gal (41.0 L)
Swing drive	2.8 gal (10.5 L)
Final drive – each side	4.0 gal (15 L)
Cooling system	14.6 gal (55.1 L)
DEF tank	40 gal (152 L)

OTHER SPECIFICATIONS

Swing speed	0 - 9.1 RPM
Swing torque	111,000 lbf-ft (150 000 N-m)
Swing brake	Mechanical disc
Undercarriage:	
Length	17 ft 11 in (5 450 mm)
Track gauge	9 ft 0 in (2 750 mm)
Carrier rollers – each side	2
Track rollers – each side	9
Shoes – Triple grouser – each side	50
Shoe width – std.	2 ft 11 in (900 mm)
Link pitch	9 in (229 mm)

Track:	
Chain	Grease lubricated/strutted
Guides	Single
Adjustment	Hydraulic

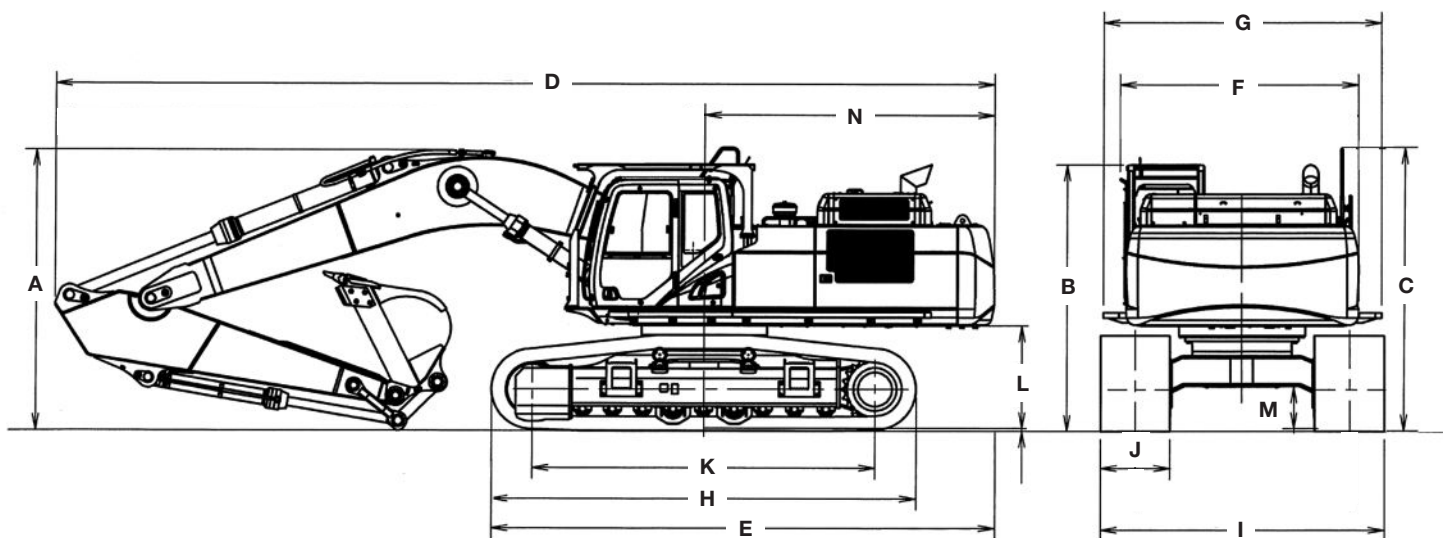


Line drawings are for illustrative purpose only
and may not be exact representation of unit.

DIMENSIONS – LC

	11 ft 1 in (3.38 m) Arm	8 ft 4 in (2.53 m) Arm	13 ft 1 in (4.00 m) Arm	15 ft 11 in (4.85 m) Arm
A. Overall height – with attachment	12 ft 0 in (3 650 mm)	12 ft 0 in (3 670 mm)	11 ft 11 in (3 630 mm)	14 ft 6 in (4 420 mm)
B. Cab height	10 ft 11 in (3 320 mm)	10 ft 11 in (3 320 mm)	10 ft 11 in (3 320 mm)	10 ft 11 in (3 320 mm)
C. Overall height – top of guardrail	12 ft 0 in (3 650 mm)	12 ft 0 in (3 650 mm)	12 ft 0 in (3 650 mm)	12 ft 0 in (3 650 mm)
D. Overall length – with attachment	39 ft 8 in (12 090 mm)	39 ft 9 in (12 110 mm)	39 ft 7 in (12 070 mm)	39 ft 11 in (12 180 mm)
E. Overall length – without attachment	21 ft 2 in (6 450 mm)	21 ft 2 in (6 450 mm)	21 ft 2 in (6 450 mm)	21 ft 2 in (6 450 mm)
F. Width of upperstructure – without catwalks	10 ft 0 in (3 060 mm)	10 ft 0 in (3 060 mm)	10 ft 0 in (3 060 mm)	10 ft 0 in (3 060 mm)
G. Width of upperstructure – with catwalks	11 ft 9 in (3 590 mm)	11 ft 9 in (3 590 mm)	11 ft 9 in (3 590 mm)	11 ft 9 in (3 590 mm)
H. Track overall length	17 ft 11 in (5 450 mm)	17 ft 11 in (5 450 mm)	17 ft 11 in (5 450 mm)	17 ft 11 in (5 450 mm)
I. Track overall width with 35.4 in (900 mm) shoes	12 ft 0 in (3 650 mm)	12 ft 0 in (3 650 mm)	12 ft 0 in (3 650 mm)	12 ft 0 in (3 650 mm)
J. Track shoe width	2 ft 11 in (900 mm)	2 ft 11 in (900 mm)	2 ft 11 in (900 mm)	2 ft 11 in (900 mm)
K. Center to center – idler to sprocket	14 ft 5 in (4 400 mm)	14 ft 5 in (4 400 mm)	14 ft 5 in (4 400 mm)	14 ft 5 in (4 400 mm)
L. Upperstructure ground clearance	4 ft 4 in (1 330 mm)	4 ft 4 in (1 330 mm)	4 ft 4 in (1 330 mm)	4 ft 4 in (1 330 mm)
M. Minimum ground clearance	1 ft 9 in (535 mm)	1 ft 9 in (535 mm)	1 ft 9 in (535 mm)	1 ft 9 in (535 mm)
N. Rear tail swing radius	12 ft 3 in (3 730 mm)	12 ft 3 in (3 730 mm)	12 ft 3 in (3 730 mm)	12 ft 3 in (3 730 mm)

DIMENSIONS – RETRACTABLE UNDERCARRIAGE

	11 ft 1 in (3.38 m) Arm	8 ft 4 in (2.53 m) Arm	13 ft 1 in (4.00 m) Arm	15 ft 11 in (4.85 m) Arm
A. Overall height – with attachment	12 ft 1 in (3 680 mm)	12 ft 2 in (3 720 mm)	12 ft 1 in (3 630 mm)	14 ft 5 in (4 390 mm)
B. Cab height	11 ft 5 in (3 470 mm)	11 ft 5 in (3 470 mm)	11 ft 5 in (3 470 mm)	11 ft 5 in (3 470 mm)
C. Overall height – top of guardrail	12 ft 6 in (3 800 mm)	12 ft 6 in (3 800 mm)	12 ft 6 in (3 800 mm)	12 ft 6 in (3 800 mm)
D. Overall length – with attachment	39 ft 7 in (12 060 mm)	39 ft 8 in (12 090 mm)	39 ft 5 in (12 020 mm)	40 ft 2 in (12 240 mm)
E. Overall length – without attachment	21 ft 2 in (6 450 mm)	21 ft 2 in (6 450 mm)	21 ft 2 in (6 450 mm)	21 ft 2 in (6 450 mm)
F. Width of upperstructure – without catwalks	10 ft 0 in (3 060 mm)	10 ft 0 in (3 060 mm)	10 ft 0 in (3 060 mm)	10 ft 0 in (3 060 mm)
G. Width of upperstructure – with catwalks	11 ft 9 in (3 590 mm)	11 ft 9 in (3 590 mm)	11 ft 9 in (3 590 mm)	11 ft 9 in (3 590 mm)
H. Track overall length	17 ft 11 in (5 450 mm)	17 ft 11 in (5 450 mm)	17 ft 11 in (5 450 mm)	17 ft 11 in (5 450 mm)
I. Track overall width with 35.4 in (900 mm) shoes:				
Extended	12 ft 5 in (3 790 mm)	12 ft 5 in (3 790 mm)	12 ft 5 in (3 790 mm)	12 ft 5 in (3 790 mm)
Retracted	10 ft 10 in (3 290 mm)	10 ft 10 in (3 290 mm)	10 ft 10 in (3 290 mm)	10 ft 10 in (3 290 mm)
J. Track shoe width	2 ft 11 in (900 mm)	2 ft 11 in (900 mm)	2 ft 11 in (900 mm)	2 ft 11 in (900 mm)
K. Center to center – idler to sprocket	14 ft 5 in (4 400 mm)	14 ft 5 in (4 400 mm)	14 ft 5 in (4 400 mm)	14 ft 5 in (4 400 mm)
L. Upperstructure ground clearance	4 ft 10 in (1 480 mm)	4 ft 10 in (1 480 mm)	4 ft 10 in (1 480 mm)	4 ft 10 in (1 480 mm)
M. Minimum ground clearance	2 ft 4 in (720 mm)	2 ft 4 in (720 mm)	2 ft 4 in (720 mm)	2 ft 4 in (720 mm)
N. Rear tail swing radius	12 ft 3 in (3 730 mm)	12 ft 3 in (3 730 mm)	12 ft 3 in (3 730 mm)	12 ft 3 in (3 730 mm)

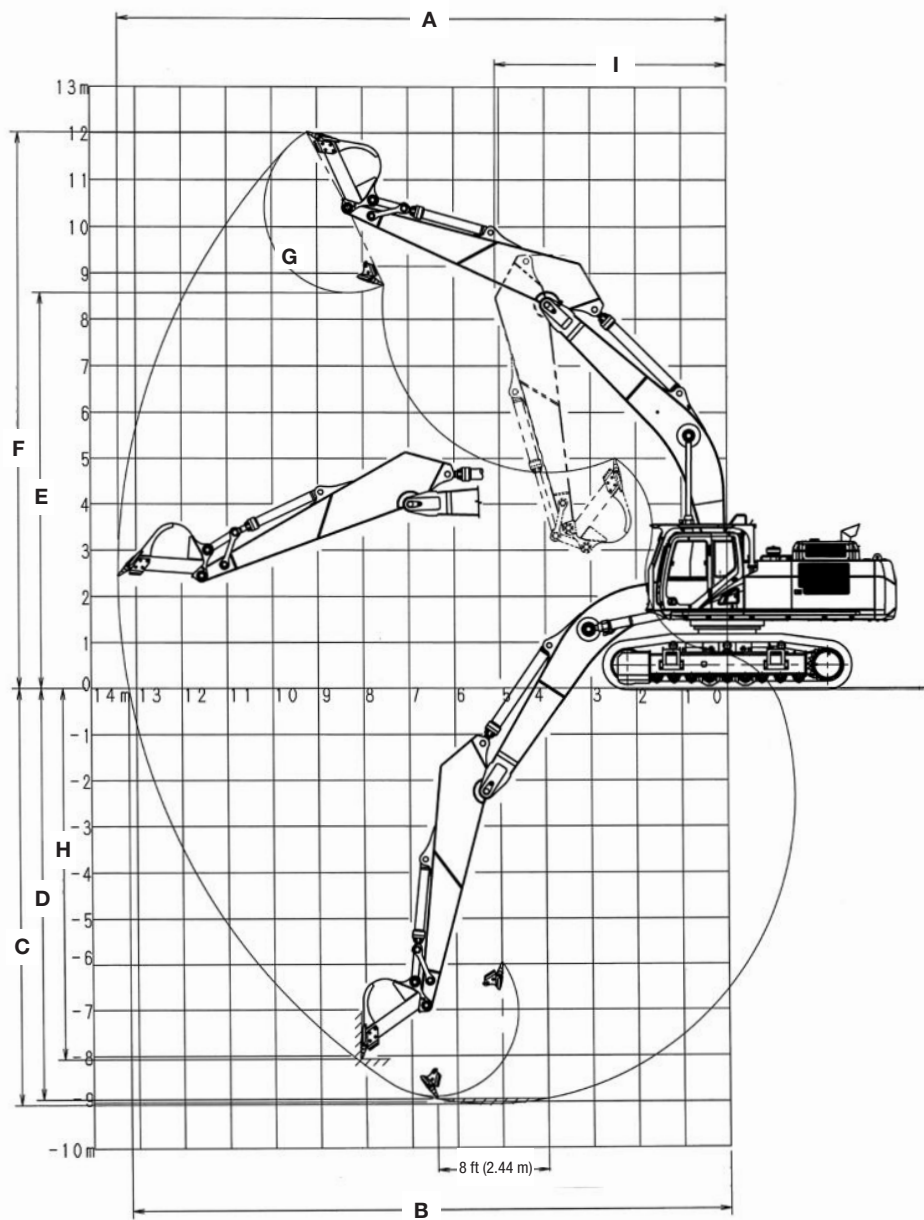

PERFORMANCE SPECS

	11 ft 1 in (3.38 m) Arm	8 ft 4 in (2.53 m) Arm	13 ft 1 in (4.00 m) Arm	15 ft 11 in (4.85 m) Arm
A. Maximum dig radius	39 ft 3 in (11 970 mm)	36 ft 10 in (11 220 mm)	41 ft 1 in (12 520 mm)	43 ft 6 in (13 270 mm)
B. Dig radius at groundline	38 ft 7 in (11 750 mm)	36 ft 0 in (10 980 mm)	40 ft 4 in (12 300 mm)	42 ft 10 in (13 060 mm)
C. Maximum dig depth	25 ft 4 in (7 720 mm)	22 ft 6 in (6 870 mm)	27 ft 4 in (8 340 mm)	30 ft 2 in (9 200 mm)
D. Dig depth - 8 ft 0 in (2.44 m) level bottom	24 ft 10 in (7 580 mm)	21 ft 11 in (6 690 mm)	26 ft 11 in (8 210 mm)	29 ft 9 in (9 080 mm)
E. Dump height	25 ft 3 in (7 690 mm)	24 ft 4 in (7 410 mm)	25 ft 10 in (7 870 mm)	26 ft 6 in (8 070 mm)
F. Maximum reach height	36 ft 5 in (11 100 mm)	35 ft 7 in (10 850 mm)	36 ft 11 in (11 260 mm)	37 ft 7 in (11 460 mm)
G. Bucket rotation	176°	176°	176°	176°
H. Maximum vertical wall dig depth	21 ft 9 in (6 640 mm)	19 ft 8 in (5 990 mm)	23 ft 4 in (7 120 mm)	26 ft 1 in (7 960 mm)
I. Minimum swing radius	16 ft 4 in (4 970 mm)	16 ft 2 in (4 930 mm)	16 ft 1 in (4 910 mm)	16 ft 8 in (5 090 mm)
Arm digging force:				
Standard	45,200 lb (201 kN)	55,300 lb (246 kN)	39,800 lb (177 kN)	35,500 lb (158 kN)
Power Boost	49,500 lb (220 kN)	60,500 lb (269 kN)	43,400 lb (193 kN)	38,900 lb (173 kN)
Bucket digging force:				
Standard	55,500 lb (247 kN)	55,500 lb (247 kN)	55,500 lb (247 kN)	55,500 lb (247 kN)
Power Boost	60,700 lb (270 kN)	60,700 lb (270 kN)	60,700 lb (270 kN)	60,700 lb (270 kN)

LIFT CAPACITIES

CX490D LC – 21 ft 6 in (6.55 m) Boom and 11 ft 1 in (2.53 m) Arm, ISO capacities, includes bucket weighing 3,200 lb (2 400 kg).

Load (Lift Point Height)	5 ft (1.5 m)		10 ft (3 m)		15 ft (4.5 m)		20 ft (6 m)		25 ft (7.5 m)		30 ft (9 m)		35 ft (10.5 m)		MAXIMUM REACH		
	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	@	END	SIDE
+30 ft (9 m)											16,314 lb* (7 400 kg)*	16,314 lb* (7 400 kg)*			30 ft 5 in (9.37 m)	12,853 lb* (5 830 kg)*	12,853 lb* (5 830 kg)*
+25 ft (7.5 m)											18,585 lb* (8 430 kg)*	18,034 lb* (8 180 kg)			33 ft 9 in (10.35 m)	12,390 lb* (5 620 kg)*	12,390 lb* (5 620 kg)*
+20 ft (6 m)									21,649 lb* (9 820 kg)*	21,649 lb* (9 820 kg)*	20,040 lb* (9 090 kg)*	17,615 lb* (7 990 kg)	17,835 lb* (8 090 kg)*	13,140 lb* (5 960 kg)	35 ft 11 in (10.99 m)	12,324 lb* (5 590 kg)*	11,905 lb* (5 400 kg)*
+15 ft (4.5 m)							29,652 lb* (13 450 kg)*	29,652 lb* (13 450 kg)*	24,317 lb* (11 030 kg)*	23,016 lb* (10 440 kg)	21,032 lb* (9 540 kg)	16,931 lb* (7 680 kg)	18,607 lb* (8 440 kg)*	12,787 lb* (5 800 kg)	37 ft 3 in (11.36 m)	12,544 lb* (5 690 kg)*	10,891 lb* (4 940 kg)
+10 ft (3 m)					46,055 lb* (20 890 kg)*	46,055 lb* (20 890 kg)*	34,590 lb* (15 690 kg)*	30,821 lb* (13 980 kg)	27,085 lb* (12 290 kg)*	21,738 lb* (9 860 kg)	22,619 lb* (10 260 kg)*	16,160 lb* (7 330 kg)	19,489 lb* (8 840 kg)	12,368 lb* (5 610 kg)	37 ft 9 in (11.5 m)	13,051 lb* (5 920 kg)*	10,384 lb* (4 710 kg)*
+5 ft (1.5 m)					51,191 lb* (23 220 kg)*	44,379 lb* (20 130 kg)	37,986 lb* (17 230 kg)*	28,881 lb* (13 100 kg)	29,211 lb* (13 250 kg)*	20,613 lb* (9 350 kg)	23,832 lb* (10 810 kg)*	15,476 lb* (7 020 kg)	20,062 lb* (9 100 kg)	11,971 lb* (5 430 kg)	37 ft 6 in (11.43 m)	13,889 lb* (6 300 kg)*	10,296 lb* (4 670 kg)
Groundline			20,327 lb* (9 220 kg)*	20,327 lb* (9 220 kg)*	49,383 lb* (22 400 kg)*	42,527 lb* (19 290 kg)	39,110 lb* (17 740 kg)	27,602 lb* (12 520 kg)	30,159 lb* (13 680 kg)*	21,738 lb* (9 860 kg)	24,295 lb* (11 020 kg)	14,969 lb* (6 790 kg)	20,040 lb* (9 090 kg)	11,707 lb* (5 310 kg)	36 ft 7 in (11.14 m)	15,146 lb* (6 870 kg)*	10,626 lb* (4 820 kg)
-5 ft (-1.5 m)	22,487 lb* (10 200 kg)*	22,487 lb* (10 200 kg)*	32,518 lb* (14 750 kg)*	32,518 lb* (14 750 kg)*	52,470 lb* (23 800 kg)*	42,770 lb* (19 400 kg)	38,647 lb* (17 530 kg)	27,227 lb* (12 350 kg)	29,895 lb* (13 560 kg)*	19,445 lb* (8 820 kg)	23,920 lb* (10 850 kg)	14,749 lb* (6 690 kg)	18,938 lb* (8 590 kg)*	11,707 lb* (5 310 kg)	34 ft 10 in (10.62 m)	17,174 lb* (7 790 kg)*	11,486 lb* (5 210 kg)
-10 ft (-3 m)	35,891 lb* (16 280 kg)*	35,891 lb* (16 280 kg)*	44,908 lb* (20 370 kg)*	44,908 lb* (20 370 kg)*	48,744 lb* (22 110 kg)*	43,519 lb* (19 740 kg)	36,707 lb* (16 650 kg)	27,470 lb* (12 460 kg)	28,484 lb* (12 920 kg)	19,599 lb* (8 890 kg)	22,134 lb* (10 040 kg)	14,991 lb* (6 800 kg)			32 ft 2 in (9.83 m)	18,166 lb* (8 240 kg)*	13,095 lb* (5 940 kg)
-15 ft (-4.5 m)			56,769 lb* (25 750 kg)*	56,769 lb* (25 750 kg)*	42,130 lb* (19 110 kg)*	42,130 lb* (19 110 kg)*	32,232 lb* (14 620 kg)*	28,109 lb* (12 750 kg)	24,582 lb* (11 150 kg)*	20,238 lb* (9 180 kg)					28 ft 4 in (8.71 m)	17,527 lb* (7 950 kg)*	16,072 lb* (7 290 kg)
-20 ft (-6 m)			40,212 lb* (18 240 kg)*	40,212 lb* (18 240 kg)*	31,173 lb* (14 140 kg)*	31,173 lb* (14 140 kg)*	23,435 lb* (10 630 kg)*	23,435 lb* (10 630 kg)*							23 ft 0 in (7.13 m)	15,631 lb* (7 090 kg)*	15,631 lb* (7 090 kg)*

CX490D RTC – 21 ft 6 in (6.55 m) Boom and 11 ft 1 in (2.53 m) Arm, ISO capacities, includes bucket weighing 3,200 lb (2 400 kg).

Load (Lift Point Height)	5 ft (1.5 m)		10 ft (3 m)		15 ft (4.5 m)		20 ft (6 m)		25 ft (7.5 m)		30 ft (9 m)		35 ft (10.5 m)		MAXIMUM REACH		
	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	@	END	SIDE
+30 ft (9 m)											16,314 lb* (7 400 kg)*	16,314 lb* (7 400 kg)*			30 ft 5 in (9.37 m)	12,853 lb* (5 830 kg)*	12,853 lb* (5 830 kg)*
+25 ft (7.5 m)											18,585 lb* (8 430 kg)*	18,585 lb* (8 430 kg)			33 ft 9 in (10.35 m)	12,390 lb* (5 620 kg)*	12,390 lb* (5 620 kg)*
+20 ft (6 m)									21,649 lb* (9 820 kg)*	21,649 lb* (9 820 kg)*	20,040 lb* (9 090 kg)*	18,960 lb* (8 600 kg)	17,835 lb* (8 090 kg)*	14,264 lb* (6 470 kg)	35 ft 11 in (10.99 m)	12,324 lb* (5 590 kg)*	12,324 lb* (5 590 kg)
+15 ft (4.5 m)							29,652 lb* (13 450 kg)*	29,652 lb* (13 450 kg)*	24,317 lb* (11 030 kg)*	24,317 lb* (11 030 kg)	21,032 lb* (9 540 kg)*	18,298 lb* (8 300 kg)	18,607 lb* (8 440 kg)*	13,911 lb* (6 310 kg)	37 ft 3 in (11.36 m)	12,544 lb* (5 690 kg)*	11,883 lb* (5 390 kg)*
+10 ft (3 m)					46,055 lb* (20 890 kg)*	46,055 lb* (20 890 kg)*	34,590 lb* (15 690 kg)*	33,091 lb* (15 010 kg)	27,095 lb* (12 290 kg)*	23,523 lb* (10 670 kg)	22,619 lb* (10 260 kg)*	17,527 lb* (7 950 kg)	19,489 lb* (8 840 kg)	13,470 lb* (6 110 kg)	37 ft 9 in (11.5 m)	13,051 lb* (5 920 kg)*	11,376 lb* (5 160 kg)
+5 ft (1.5 m)					51,191 lb* (23 220 kg)*	48,413 lb* (21 960 kg)	37,986 lb* (17 230 kg)*	31,372 lb* (14 230 kg)	29,211 lb* (13 250 kg)*	22,377 lb* (10 150 kg)	23,832 lb* (10 810 kg)*	16,843 lb* (7 640 kg)	20,062 lb* (9 100 kg)	13,073 lb* (5 930 kg)	37 ft 6 in (11.43 m)	13,889 lb* (6 300 kg)*	11,288 lb* (5 120 kg)
Groundline			20,327 lb* (9 220 kg)*	20,327 lb* (9 220 kg)*	49,383 lb* (22 400 kg)*	46,385 lb* (21 040 kg)	39,110 lb* (17 740 kg)	30,071 lb* (13 640 kg)	30,159 lb* (13 680 kg)*	21,539 lb* (9 770 kg)	24,295 lb* (11 020 kg)	16,314 lb* (7 400 kg)	20,040 lb* (9 090 kg)	12,809 lb* (5 810 kg)	36 ft 7 in (11.14 m)	15,146 lb* (6 870 kg)*	11,662 lb* (5 290 kg)
-5 ft (-1.5 m)	22,487 lb* (10 200 kg)*	22,487 lb* (10 200 kg)*	32,518 lb* (14 750 kg)*	32,518 lb* (14 750 kg)*	52,470 lb* (23 800 kg)*	46,407 lb* (21 050 kg)	38,647 lb* (17 530 kg)	29,696 lb* (13 470 kg)	29,895 lb* (13 560 kg)*	21,186 lb* (9 610 kg)	23,920 lb* (10 850 kg)	16,116 lb* (7 310 kg)	18,938 lb* (8 590 kg)*	12,809 lb* (5 810 kg)	34 ft 10 in (10.62 m)	17,174 lb* (7 790 kg)*	12,588 lb* (5 710 kg)
-10 ft (-3 m)	35,891 lb* (16 280 kg)*	35,891 lb* (16 280 kg)*	44,908 lb* (20 370 kg)*	44,908 lb* (20 370 kg)*	48,744 lb* (22 110 kg)*	47,025 lb* (21 330 kg)	36,707 lb* (16 650 kg)	29,917 lb* (13 570 kg)	28,484 lb* (12 920 kg)*	21,341 lb* (9 680 kg)	22,134 lb* (10 040 kg)*	16,336 lb* (7 410 kg)			32 ft 3 in (9.83 m)	18,166 lb* (8 240 kg)*	14,308 lb* (6 490 kg)
-15 ft (-4.5 m)			56,769 lb* (25 750 kg)*	56,769 lb* (25 750 kg)*	42,130 lb* (19 110 kg)*	42,130 lb* (19 110 kg)*	32,232 lb* (14 620 kg)*	30,203 lb* (13 700 kg)	24,582 lb* (11 150 kg)*	21,804 lb* (9 890 kg)					28 ft 4 in (8.71 m)	17,527 lb* (7 950 kg)*	17,483 lb* (7 930 kg)
-20 ft (-6 m)			40,212 lb* (18 240 kg)*	40,212 lb* (18 240 kg)*	31,173 lb* (14 140 kg)*	31,173 lb* (14 140 kg)*	23,435 lb* (10 630 kg)*	23,435 lb* (10 630 kg)*							23 ft 0 in (7.13 m)	15,631 lb* (7 090 kg)*	15,631 lb* (7 090 kg)*

CX490D LC S-Long – 22 ft 11 in (6.98 m) Boom and 15 ft 11 in (4.85 m) Arm, ISO capacities, includes bucket weighing 2,800 lb (1 260 kg).

Load (Lift Point Height)	0 ft (0.0 m)		5 ft (1.5 m)		10 ft (3 m)		15 ft (4.5 m)		20 ft (6 m)		25 ft (7.5 m)		30 ft (9 m)		35 ft (10.5 m)		40 ft (12.0 m)		MAXIMUM REACH			
	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	@	END	SIDE	
+30 ft (9.1 m)																11,861 lb* (5 380 kg)*	11,861 lb* (5 380 kg)*			35 ft 8 in (10.96 m)	9,259 lb* (4 200 kg)*	9,259 lb* (4 200 kg)*
+25 ft (7.5 m)																14,286 lb* (6 480 kg)*	14,286 lb* (6 480 kg)*			38 ft 6 in (11.78 m)	9,017 lb* (4 090 kg)*	9,017 lb* (4 090 kg)*
+20 ft (6 m)														16,843 lb* (7 640 kg)*	16,843 lb* (7 640 kg)*	15,498 lb* (7 030 kg)*	14,088 lb* (6 390 kg)	11,574 lb* (5 250 kg)*	10,648 lb* (4 830 kg)*	40 ft 5 in (12.34 m)	8,995 lb* (4 080 kg)*	8,995 lb* (4 080 kg)*
+15 ft (4.5 m)														18,232 lb* (8 270 kg)*	17,879 lb* (8 110 kg)	16,998 lb* (7 710 kg)*	15,580 lb* (6 160 kg)	13,955 lb* (6 330 kg)*	10,406 lb* (4 720 kg)	41 ft 6 in (12.67 m)	9,193 lb* (4 170 kg)*	9,193 lb* (4 170 kg)*
+10 ft (3 m)							38,779 lb* (17 590 kg)*	38,779 lb* (17 590 kg)*	29,630 lb* (13 440 kg)*	29,630 lb* (13 440 kg)*	24,052 lb* (10 910 kg)*	22,972 lb* (10 420 kg)	20,459 lb* (9 280 kg)*	17,042 lb* (7 730 kg)	17,924 lb* (8 130 kg)*	12,985 lb* (5 890 kg)	15,697 lb* (7 120 kg)*	10,053 lb* (4 560 kg)	42 ft 0 in (12.8 m)	9,546 lb* (4 330 kg)*	8,774 lb* (3 980 kg)*	
+5 ft (1.5 m)					27,933 lb* (12 670 kg)*	27,933 lb* (12 670 kg)*	48,656 lb* (22 070 kg)*	46,892 lb* (21 270 kg)*	34,524 lb* (15 660 kg)*	30,556 lb* (13 860 kg)	26,985 lb* (12 240 kg)*	21,627 lb* (9 810 kg)	22,355 lb* (10 140 kg)*	16,138 lb* (7 320 kg)	19,114 lb* (8 670 kg)	12,412 lb* (5 630 kg)	16,711 lb* (7 580 kg)*	9,722 lb* (4 410 kg)	41 ft 9 in (12.73 m)	10,163 lb* (4 610 kg)*	8,664 lb* (3 930 kg)*	
Groundline					25,243 lb* (11 450 kg)*	25,243 lb* (11 450 kg)*	51,522 lb* (23 370 kg)*	44,181 lb* (20 040 kg)	37,721 lb* (17 110 kg)*	28,572 lb* (12 960 kg)	29,079 lb* (13 190 kg)*	20,415 lb* (9 260 kg)	23,656 lb* (10 730 kg)	15,366 lb* (6 970 kg)	19,864 lb* (9 010 kg)	11,927 lb* (5 410 kg)	16,424 lb* (7 450 kg)*	9,458 lb* (4 290 kg)	40 ft 11 in (12.47 m)	11,045 lb* (5 010 kg)*	8,818 lb* (4 000 kg)*	
-5 ft (-1.5 m)	16,667 lb (7 560 kg)	16,667 lb (7 560 kg)	20,591 lb* (9 340 kg)*	20,591 lb* (9 340 kg)*	30,424 lb* (13 800 kg)*	30,424 lb* (13 800 kg)*	53,220 lb* (24 140 kg)*	42,483 lb* (19 270 kg)	38,823 lb* (17 610 kg)*	27,315 lb* (12 390 kg)	29,961 lb* (13 590 kg)*	19,577 lb* (8 880 kg)	24,119 lb* (10 940 kg)	14,815 lb* (6 720 kg)	19,930 lb* (9 040 kg)	11,618 lb* (5 270 kg)	12,522 lb* (5 680 kg)*	9,348 lb* (4 240 kg)	39 ft 5 in (12.01 m)	12,368 lb* (5 610 kg)*	9,326 lb* (4 230 kg)	
-10 ft (-3 m)	25,022 lb (11 350 kg)	25,022 lb (11 350 kg)	28,373 lb* (12 870 kg)*	28,373 lb* (12 870 kg)*	38,162 lb* (17 310 kg)*	38,162 lb* (17 310 kg)*	52,492 lb* (23 810 kg)*	42,417 lb* (19 240 kg)	38,338 lb* (17 390 kg)*	27,007 lb* (12 250 kg)	29,630 lb* (13 440 kg)*	19,290 lb* (8 750 kg)	23,744 lb* (10 770 kg)	14,639 lb* (6 640 kg)	19,202 lb* (8 710 kg)	11,574 lb* (5 250 kg)			37 ft 1 in (11.32 m)	14,374 lb* (6 520 kg)*	10,296 lb* (4 670 kg)	
-15 ft (-4.5 m)	30,776 lb (13 960 kg)	30,776 lb (13 960 kg)	37,765 lb* (17 130 kg)*	37,765 lb* (17 130 kg)*	49,339 lb* (22 380 kg)*	49,339 lb* (22 380 kg)*	48,987 lb* (22 220 kg)*	42,924 lb* (19 470 kg)	36,376 lb* (16 500 kg)*	27,249 lb* (12 360 kg)	28,175 lb* (12 780 kg)*	19,467 lb* (8 830 kg)	22,134 lb* (10 040 kg)	14,859 lb* (6 740 kg)					33 ft 10 in (10.37 m)	16,689 lb* (7 570 kg)*	11,949 lb* (5 420 kg)	
-20 ft (-6 m)			47,995 lb* (21 770 kg)*	47,995 lb* (21 770 kg)*	59,877 lb* (27 160 kg)*	59,877 lb* (27 160 kg)*	42,329 lb* (19 200 kg)*	42,329 lb* (19 200 kg)	31,835 lb* (14 440 kg)*	27,910 lb* (12 660 kg)	24,295 lb* (11 020 kg)	20,128 lb* (9 130 kg)	17,328 lb* (7 860 kg)*	15,322 lb* (6 950 kg)					29 ft 5 in (9.07 m)	16,491 lb* (7 480 kg)*	14,969 lb* (6 790 kg)	
-25 ft (-7.5 m)					42,108 lb* (19 100 kg)*	42,108 lb* (19 100 kg)*	30,953 lb* (14 040 kg)*	30,953 lb* (14 040 kg)*	22,906 lb* (10 390 kg)*	22,906 lb* (10 390 kg)*									23 ft 3 in (7.27 m)	15,234 lb* (6 910 kg)*	15,234 lb* (6 910 kg)*	

LIFT CAPACITIES

CX490D RTC S-Long – 22 ft 11 in (6.98 m) Boom and 15 ft 11 in (4.85 m) Arm, ISO capacities, includes bucket weighing 2,800 lb (1 260 kg).

Load (Lift Point Height)	0 ft (0.0 m)		5 ft (1.5 m)		10 ft (3 m)		15 ft (4.5 m)		20 ft (6 m)		25 ft (7.5 m)		30 ft (9 m)		35 ft (10.5 m)		40 ft (12.0 m)		MAXIMUM REACH		
	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	@	END	SIDE
+30 ft (9.1 m)															11,861 lb* (5 380 kg)*	11,861 lb* (5 380 kg)*			35 ft 8 in (10.96 m)	9,259 lb* (4 200 kg)*	9,259 lb* (4 200 kg)*
+25 ft (7.5 m)															14,286 lb* (6 480 kg)*	14,286 lb* (6 480 kg)*			38 ft 6 in (11.78 m)	9,017 lb* (4 090 kg)*	9,017 lb* (4 090 kg)*
+20 ft (6 m)													16,843 lb* (7 640 kg)*	16,843 lb* (7 640 kg)*	15,498 lb* (6 890 kg)*	15,190 lb* (6 890 kg)*	11,574 lb* (5 250 kg)*	11,574 lb* (5 250 kg)*	40 ft 5 in (12.34 m)	8,995 lb* (4 080 kg)*	8,995 lb* (4 080 kg)*
+15 ft (4.5 m)													18,232 lb* (8 270 kg)*	18,232 lb* (8 270 kg)*	16,998 lb* (7 710 kg)*	14,705 lb* (6 670 kg)*	13,955 lb* (6 330 kg)*	11,332 lb* (5 140 kg)*	41 ft 6 in (12.67 m)	9,193 lb* (4 170 kg)*	9,193 lb* (4 170 kg)*
+10 ft (3 m)							38,779 lb* (17 590 kg)*	38,779 lb* (17 590 kg)*	29,630 lb* (13 440 kg)*	29,630 lb* (13 440 kg)*	24,052 lb* (10 910 kg)*	24,052 lb* (10 910 kg)*	20,459 lb* (9 280 kg)*	18,431 lb* (8 360 kg)*	17,924 lb* (8 130 kg)*	14,110 lb* (6 400 kg)*	15,697 lb* (7 120 kg)*	11,001 lb* (4 990 kg)*	42 ft 0 in (12.8 m)	9,546 lb* (4 330 kg)*	9,546 lb* (4 330 kg)*
+5 ft (1.5 m)						27,933 lb* (12 670 kg)*	27,933 lb* (12 670 kg)*	48,656 lb* (22 070 kg)*	34,524 lb* (15 660 kg)*	32,871 lb* (14 910 kg)*	26,985 lb* (12 240 kg)*	23,391 lb* (10 610 kg)*	22,355 lb* (10 140 kg)*	17,505 lb* (7 940 kg)*	19,114 lb* (8 670 kg)*	13,536 lb* (6 140 kg)*	16,711 lb* (7 580 kg)*	10,670 lb* (4 840 kg)*	41 ft 9 in (12.73 m)	10,163 lb* (4 610 kg)*	9,524 lb* (4 320 kg)*
Groundline					25,243 lb* (11 450 kg)*	25,243 lb* (11 450 kg)*	51,522 lb* (23 370 kg)*	48,281 lb* (21 900 kg)*	37,721 lb* (17 110 kg)*	31,063 lb* (14 090 kg)*	29,079 lb* (13 190 kg)*	22,178 lb* (10 060 kg)*	23,656 lb* (10 730 kg)*	16,733 lb* (7 590 kg)*	19,864 lb* (9 010 kg)*	13,051 lb* (5 920 kg)*	16,424 lb* (7 450 kg)*	10,384 lb* (4 710 kg)*	40 ft 11 in (12.47 m)	11,045 lb* (5 010 kg)*	9,722 lb* (4 410 kg)*
-5 ft (-1.5 m)	16,667 lb (7 560 kg)	16,667 lb (7 560 kg)	20,591 lb* (9 340 kg)*	20,591 lb* (9 340 kg)*	30,424 lb* (13 800 kg)*	30,424 lb* (13 800 kg)*	53,220 lb* (24 140 kg)*	46,540 lb* (21 110 kg)*	38,823 lb* (17 610 kg)*	29,784 lb* (13 510 kg)*	29,961 lb* (13 590 kg)*	21,319 lb* (9 670 kg)*	24,119 lb* (10 940 kg)*	16,182 lb* (7 340 kg)*	19,930 lb* (9 040 kg)*	12,721 lb* (5 770 kg)*	12,522 lb* (5 680 kg)*	10,274 lb* (4 660 kg)*	39 ft 5 in (12.01 m)	12,368 lb* (5 610 kg)*	10,251 lb* (4 650 kg)*
-10 ft (-3 m)	25,022 lb (11 350 kg)	25,022 lb (11 350 kg)	28,373 lb* (12 870 kg)*	28,373 lb* (12 870 kg)*	38,162 lb* (17 310 kg)*	38,162 lb* (17 310 kg)*	52,492 lb* (23 810 kg)*	46,429 lb* (21 060 kg)*	38,338 lb* (17 390 kg)*	29,432 lb* (13 350 kg)*	29,630 lb* (13 440 kg)*	21,032 lb* (9 540 kg)*	23,744 lb* (10 770 kg)*	15,983 lb* (7 250 kg)*	19,202 lb* (8 710 kg)*	12,677 lb* (5 750 kg)*			37 ft 1 in (11.32 m)	14,374 lb* (6 520 kg)*	11,288 lb* (5 120 kg)*
-15 ft (-4.5 m)	30,776 lb (13 960 kg)	30,776 lb (13 960 kg)	37,765 lb* (17 130 kg)*	37,765 lb* (17 130 kg)*	49,339 lb* (22 380 kg)*	49,339 lb* (22 380 kg)*	48,987 lb* (22 220 kg)*	46,694 lb* (21 180 kg)*	36,376 lb* (16 500 kg)*	29,696 lb* (13 470 kg)*	28,175 lb* (12 780 kg)*	21,208 lb* (9 620 kg)*	22,134 lb* (10 040 kg)*	16,226 lb* (7 360 kg)*					33 ft 10 in (10.37 m)	16,688 lb* (7 570 kg)*	13,073 lb* (5 930 kg)*
-20 ft (-6 m)			47,995 lb* (21 770 kg)*	47,995 lb* (21 770 kg)*	59,877 lb* (27 160 kg)*	59,877 lb* (27 160 kg)*	42,329 lb* (19 200 kg)*	42,329 lb* (19 200 kg)*	31,835 lb* (14 440 kg)*	29,961 lb* (13 590 kg)*	24,295 lb* (11 020 kg)*	21,649 lb* (9 820 kg)*	17,328 lb* (7 860 kg)*	16,535 lb* (7 500 kg)*					29 ft 5 in (9.07 m)	16,491 lb* (7 480 kg)*	16,314 lb* (7 400 kg)*
-25 ft (-7.5 m)					42,108 lb* (19 100 kg)*	42,108 lb* (19 100 kg)*	30,953 lb* (14 040 kg)*	30,953 lb* (14 040 kg)*	22,906 lb* (10 390 kg)*	22,906 lb* (10 390 kg)*									23 ft 3 in (7.27 m)	15,234 lb* (6 910 kg)*	15,234 lb* (6 910 kg)*

CX490D LC Short – 22 ft 11 in (6.98 m) Boom and 8 ft 3 in (2.53 m) Arm, ISO capacities, includes bucket weighing 3,350 lb (1 530 kg).

Load (Lift Point Height)	10 ft (3 m)		15 ft (4.5 m)		20 ft (6 m)		25 ft (7.5 m)		30 ft (9 m)		35 ft (10.5 m)		MAXIMUM REACH		
	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	@	END	SIDE
+30 ft (9 m)							15,653 lb* (7 100 kg)*	15,653 lb* (7 100 kg)*					27 ft 1 in (8.39 m)	17,968 lb* (8 150 kg)*	17,968 lb* (8 150 kg)*
+25 ft (7.5 m)							21,870 lb* (9 920 kg)*	21,870 lb* (9 920 kg)*	20,349 lb* (9 230 kg)*	17,615 lb* (7 990 kg)*			30 ft 11 in (9.48 m)	17,262 lb* (7 830 kg)*	15,851 lb* (7 190 kg)*
+20 ft (6 m)					27,910 lb* (12 660 kg)*	27,910 lb* (12 660 kg)*	24,074 lb* (10 920 kg)*	23,391 lb* (10 610 kg)*	21,407 lb* (9 710 kg)*	17,240 lb* (7 820 kg)*			33 ft 4 in (10.19 m)	17,108 lb* (7 760 kg)*	13,580 lb* (6 160 kg)*
+15 ft (4.5 m)			41,910 lb* (19 010 kg)*	41,910 lb* (19 010 kg)*	32,805 lb* (14 880 kg)*	31,702 lb* (14 380 kg)*	26,323 lb* (11 940 kg)*	22,465 lb* (10 190 kg)*	22,774 lb* (10 330 kg)*	16,623 lb* (7 510 kg)*	19,908 lb* (9 030 kg)*	12,588 lb* (5 710 kg)*	34 ft 9 in (10.6 m)	17,394 lb* (7 890 kg)*	12,324 lb* (5 590 kg)*
+10 ft (3 m)			49,802 lb* (22 590 kg)*	45,658 lb* (20 710 kg)*	37,126 lb* (16 840 kg)*	29,961 lb* (13 590 kg)*	28,682 lb* (13 010 kg)*	21,341 lb* (9 680 kg)*	23,766 lb* (10 780 kg)*	15,983 lb* (7 250 kg)*	20,349 lb* (9 230 kg)*	12,302 lb* (5 580 kg)*	35 ft 3 in (10.75 m)	18,012 lb* (8 170 kg)*	11,751 lb* (5 330 kg)*
+5 ft (1.5 m)			36,994 lb* (16 780 kg)*	36,994 lb* (16 780 kg)*	39,264 lb* (17 810 kg)*	38,351 lb* (17 390 kg)*	30,203 lb* (13 700 kg)*	20,393 lb* (9 250 kg)*	24,515 lb* (11 120 kg)*	15,410 lb* (6 990 kg)*	20,437 lb* (9 270 kg)*	12,037 lb* (5 460 kg)*	35 ft 0 in (10.67 m)	19,092 lb* (8 660 kg)*	11,707 lb* (5 310 kg)*
Groundline			44,092 lb* (20 000 kg)*	42,020 lb* (19 060 kg)*	39,242 lb* (17 800 kg)*	27,492 lb* (12 470 kg)*	30,402 lb* (13 790 kg)*	19,775 lb* (8 970 kg)*	24,493 lb* (11 110 kg)*	15,058 lb* (6 830 kg)*			34 ft 0 in (10.36 m)	19,930 lb* (9 040 kg)*	12,192 lb* (5 530 kg)*
-5 ft (-1.5 m)	35,494 lb* (16 100 kg)*	35,494 lb* (16 100 kg)*	50,243 lb* (22 790 kg)*	42,968 lb* (19 490 kg)*	38,096 lb* (17 280 kg)*	27,558 lb* (12 500 kg)*	29,696 lb* (13 470 kg)*	19,709 lb* (8 940 kg)*	23,391 lb* (10 610 kg)*	15,102 lb* (6 850 kg)*			32 ft 1 in (9.79 m)	19,709 lb* (8 940 kg)*	13,360 lb* (6 060 kg)*
-10 ft (-3 m)	51,698 lb* (23 450 kg)*	51,698 lb* (23 450 kg)*	44,908 lb* (20 370 kg)*	43,563 lb* (19 760 kg)*	34,833 lb* (15 800 kg)*	28,043 lb* (12 720 kg)*	27,007 lb* (12 250 kg)*	20,106 lb* (9 120 kg)*					29 ft 2 in (8.92 m)	19,070 lb* (8 650 kg)*	15,609 lb* (7 080 kg)*
-15 ft (-4.5 m)	45,217 lb* (20 510 kg)*	45,217 lb* (20 510 kg)*	36,354 lb* (16 490 kg)*	36,354 lb* (16 490 kg)*	28,351 lb* (12 860 kg)*	28,131 lb* (12 760 kg)*	19,908 lb* (9 030 kg)*	19,908 lb* (9 030 kg)*					24 ft 11 in (7.68 m)	17,416 lb* (7 900 kg)*	17,416 lb* (7 900 kg)*

CX490D RTC Short – 22 ft 11 in (6.98 m) Boom and 8 ft 3 in (2.53 m) Arm, ISO capacities, includes bucket weighing 3,350 lb (1 530 kg).

Load (Lift Point Height)	10 ft (3 m)		15 ft (4.5 m)		20 ft (6 m)		25 ft (7.5 m)		30 ft (9 m)		35 ft (10.5 m)		MAXIMUM REACH		
	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	@	END	SIDE
+30 ft (9 m)							15,653 lb* (7 100 kg)*	15,653 lb* (7 100 kg)*					27 ft 1 in (8.39 m)	17,968 lb* (8 150 kg)*	17,968 lb* (8 150 kg)*
+25 ft (7.5 m)							21,870 lb* (9 920 kg)*	21,870 lb* (9 920 kg)*	20,349 lb* (9 230 kg)*	18,982 lb* (8 610 kg)*			30 ft 11 in (9.48 m)	17,262 lb* (7 830 kg)*	17,130 lb* (7 770 kg)*
+20 ft (6 m)					27,910 lb* (12 660 kg)*	27,910 lb* (12 660 kg)*	24,074 lb* (10 920 kg)*	24,074 lb* (10 920 kg)*	21,407 lb* (9 710 kg)*	18,607 lb* (8 440 kg)*			33 ft 4 in (10.19 m)	17,108 lb* (7 760 kg)*	14,727 lb* (6 680 kg)*
+15 ft (4.5 m)			41,910 lb* (19 010 kg)*	41,910 lb* (19 010 kg)*	32,805 lb* (14 880 kg)*	32,805 lb* (14 880 kg)*	26,323 lb* (11 940 kg)*	24,251 lb* (11 000 kg)*	22,774 lb* (10 330 kg)*	17,990 lb* (8 160 kg)*	19,908 lb* (9 030 kg)*	13,691 lb* (6 210 kg)*	34 ft 9 in (10.6 m)	17,394 lb* (7 890 kg)*	13,426 lb* (6 090 kg)*
+10 ft (3 m)			49,802 lb* (22 590 kg)*	45,626 lb* (20 710 kg)*	37,126 lb* (16 840 kg)*	32,474 lb* (14 730 kg)*	28,682 lb* (13 010 kg)*	23,104 lb* (10 480 kg)*	23,766 lb* (10 780 kg)*	17,350 lb* (7 870 kg)*	20,349 lb* (9 230 kg)*	13,404 lb* (6 080 kg)*	35 ft 3 in (10.75 m)	18,012 lb* (8 170 kg)*	12,831 lb* (5 820 kg)*
+5 ft (1.5 m)			36,994 lb* (16 780 kg)*	36,994 lb* (16 780 kg)*	39,264 lb* (17 810 kg)*	30,843 lb* (13 990 kg)*	30,203 lb* (13 700 kg)*	22,156 lb* (10 050 kg)*	24,515 lb* (11 120 kg)*	16,777 lb* (7 610 kg)*	20,437 lb* (9 270 kg)*	13,140 lb* (5 960 kg)*	35 ft 0 in (10.67 m)	19,092 lb* (8 660 kg)*	12,787 lb* (5 800 kg)*
Groundline			44,092 lb* (20 000 kg)*	44,092 lb* (20 000 kg)*	39,242 lb* (17 800 kg)*	29,961 lb* (13 590 kg)*	30,402 lb* (13 790 kg)*	21,517 lb* (9 760 kg)*	24,493 lb* (11 110 kg)*	16,402 lb* (7 440 kg)*			34 ft 0 in (10.36 m)	19,930 lb* (9 040 kg)*	13,316 lb* (6 040 kg)*
-5 ft (-1.5 m)	35,494 lb* (16 100 kg)*	35,494 lb* (16 100 kg)*	50,243 lb* (22 790 kg)*	46,782 lb* (21 220 kg)*	38,096 lb* (17 280 kg)*	30,005 lb* (13 610 kg)*	29,696 lb* (13 470 kg)*	21,451 lb* (9 730 kg)*	23,391 lb* (10 610 kg)*	16,446 lb* (7 460 kg)*			32 ft 1 in (9.79 m)	19,709 lb* (8 940 kg)*	14,573 lb* (6 610 kg)*
-10 ft (-3 m)	51,698 lb* (23 450 kg)*	51,698 lb* (23 450 kg)*	44,908 lb* (20 370 kg)*	44,908 lb* (20 370 kg)*	34,833 lb* (15 800 kg)*	30,490 lb* (13 830 kg)*	27,007 lb* (12 250 kg)*	21,848 lb* (9 910 kg)*					29 ft 2 in (8.92 m)	19,070 lb* (8 650 kg)*	16,976 lb* (7 700 kg)*
-15 ft (-4.5 m)	45,217 lb* (20 510 kg)*	45,217 lb* (20 510 kg)*	36,354 lb* (16 490 kg)*	36,354 lb* (16 490 kg)*	28,351 lb* (12 860 kg)*	28,351 lb* (12 860 kg)*	19,908 lb* (9 030 kg)*	19,908 lb* (9 030 kg)*					24 ft 11 in (7.68 m)	17,416 lb* (7 900 kg)*	17,416 lb* (7 900 kg)*

NOTE: *Following number indicates hydraulic capacity

LIFT CAPACITIES

CX490D Long – 22 ft 11 in (6.98 m) Boom and 13 ft 1 in (4.00 m) Arm, ISO capacities, includes bucket weighing 3,000 lb (1 370 kg).

Load (Lift Point Height)	5 ft (1.5 m)		10 ft (3 m)		15 ft (4.5 m)		20 ft (6 m)		25 ft (7.5 m)		30 ft (9 m)		35 ft (10.5 m)		40 ft (12.0 m)		MAXIMUM REACH		
	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	@	END	SIDE
+30 ft (9 m)											13,955 lb* (6 330 kg)*	13,955 lb* (6 330 kg)*					32 ft 8 in (10.05 m)	10,274 lb* (4 660 kg)*	10,274 lb* (4 660 kg)*
+25 ft (7.5 m)											17,439 lb* (7 910 kg)*	17,439 lb* (7 910 kg)*	13,757 lb* (6 240 kg)*	13,757 lb* (6 240 kg)*			35 ft 9 in (10.96 m)	9,921 lb* (4 500 kg)*	9,921 lb* (4 500 kg)*
+20 ft (6 m)											18,938 lb* (8 590 kg)*	18,078 lb* (8 200 kg)*	16,976 lb* (7 700 kg)*	13,691 lb* (6 210 kg)*			37 ft 10 in (11.56 m)	9,899 lb* (4 490 kg)*	9,899 lb* (4 490 kg)*
+15 ft (4.5 m)							25,265 lb* (11 460 kg)*	25,265 lb* (11 460 kg)*	23,104 lb* (10 480 kg)*	23,104 lb* (10 480 kg)*	20,128 lb* (9 130 kg)*	17,505 lb* (7 940 kg)*	18,012 lb* (8 170 kg)*	13,272 lb* (6 020 kg)*			39 ft 1 in (11.91 m)	10,097 lb* (4 580 kg)*	10,097 lb* (4 580 kg)*
+10 ft (3 m)			34,590 lb* (15 690 kg)*	34,590 lb* (15 690 kg)*	45,680 lb* (20 720 kg)*	45,680 lb* (20 720 kg)*	32,937 lb* (14 940 kg)*	31,614 lb* (14 340 kg)*	26,147 lb* (11 860 kg)*	22,465 lb* (10 190 kg)*	22,046 lb* (10 000 kg)*	16,711 lb* (7 580 kg)*	19,136 lb* (8 680 kg)*	12,787 lb* (5 800 kg)*	11,244 lb* (5 100 kg)*	9,943 lb* (4 510 kg)*	39 ft 6 in (12.05 m)	10,494 lb* (4 760 kg)*	9,833 lb* (4 460 kg)*
+5 ft (1.5 m)			16,843 lb* (7 640 kg)*	16,843 lb* (7 640 kg)*	50,508 lb* (22 910 kg)*	46,077 lb* (20 900 kg)*	37,104 lb* (16 830 kg)*	29,829 lb* (13 530 kg)*	28,704 lb* (13 020 kg)*	21,230 lb* (9 630 kg)*	23,567 lb* (10 690 kg)*	15,939 lb* (7 230 kg)*	19,996 lb* (9 070 kg)*	12,324 lb* (5 590 kg)*			39 ft 4 in (11.98 m)	11,177 lb* (5 070 kg)*	9,744 lb* (4 420 kg)*
Groundline			23,193 lb* (10 520 kg)*	23,193 lb* (10 520 kg)*	53,175 lb* (24 120 kg)*	43,696 lb* (19 820 kg)*	39,198 lb* (17 780 kg)*	28,307 lb* (12 840 kg)*	30,203 lb* (13 700 kg)*	20,283 lb* (9 200 kg)*	24,427 lb* (11 080 kg)*	15,344 lb* (6 960 kg)*	20,305 lb* (9 210 kg)*	11,971 lb* (5 430 kg)*			38 ft 5 in (11.7 m)	12,236 lb* (5 550 kg)*	9,987 lb* (4 530 kg)*
-5 ft (-1.5 m)	22,134 lb* (10 040 kg)*	22,134 lb* (10 040 kg)*	31,416 lb* (14 250 kg)*	31,416 lb* (14 250 kg)*	53,727 lb* (24 370 kg)*	43,166 lb* (19 580 kg)*	39,220 lb* (17 790 kg)*	27,558 lb* (12 500 kg)*	30,358 lb* (13 770 kg)*	19,731 lb* (8 950 kg)*	24,405 lb* (11 070 kg)*	14,991 lb* (6 800 kg)*	19,930 lb* (9 040 kg)*	11,817 lb* (5 360 kg)*			36 ft 9 in (11.21 m)	13,801 lb* (6 260 kg)*	10,692 lb* (4 850 kg)*
-10 ft (-3 m)	32,298 lb* (14 650 kg)*	32,298 lb* (14 650 kg)*	41,447 lb* (18 800 kg)*	41,447 lb* (18 800 kg)*	51,346 lb* (23 290 kg)*	43,475 lb* (19 720 kg)*	38,096 lb* (17 280 kg)*	27,580 lb* (12 510 kg)*	29,542 lb* (13 400 kg)*	19,709 lb* (8 940 kg)*	23,413 lb* (10 620 kg)*	15,013 lb* (6 810 kg)*					34 ft 3 in (10.46 m)	16,314 lb* (7 400 kg)*	11,971 lb* (5 430 kg)*
-15 ft (-4.5 m)	41,910 lb* (19 010 kg)*	41,910 lb* (19 010 kg)*	56,019 lb* (25 410 kg)*	56,019 lb* (25 410 kg)*	46,032 lb* (20 880 kg)*	43,696 lb* (19 820 kg)*	34,767 lb* (15 770 kg)*	28,065 lb* (12 730 kg)*	26,852 lb* (12 180 kg)*	20,106 lb* (9 120 kg)*	20,150 lb* (9 140 kg)*	15,543 lb* (7 050 kg)*					30 ft 9 in (9.42 m)	17,571 lb* (7 970 kg)*	14,286 lb* (6 480 kg)*
-20 ft (-6 m)			50,023 lb* (22 690 kg)*	50,023 lb* (22 690 kg)*	37,016 lb* (16 790 kg)*	37,016 lb* (16 790 kg)*	28,087 lb* (12 740 kg)*	28,021 lb* (12 710 kg)*	20,371 lb* (9 240 kg)*	20,216 lb* (9 170 kg)*							25 ft 10 in (7.98 m)	16,645 lb* (7 550 kg)*	16,645 lb* (7 550 kg)*

CX490D RTC Long – 22 ft 11 in (6.98 m) Boom and 13 ft 1 in (4.00 m) Arm, ISO capacities, includes bucket weighing 3,000 lb (1 370 kg).

Load (Lift Point Height)	5 ft (1.5 m)		10 ft (3 m)		15 ft (4.5 m)		20 ft (6 m)		25 ft (7.5 m)		30 ft (9 m)		35 ft (10.5 m)		40 ft (12.0 m)		MAXIMUM REACH		
	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	@	END	SIDE
+30 ft (9 m)											13,955 lb* (6 330 kg)*	13,955 lb* (6 330 kg)*					32 ft 8 in (10.05 m)	10,274 lb* (4 660 kg)*	10,274 lb* (4 660 kg)*
+25 ft (7.5 m)											17,439 lb* (7 910 kg)*	17,439 lb* (7 910 kg)*	13,757 lb* (6 240 kg)*	13,757 lb* (6 240 kg)*			35 ft 9 in (10.96 m)	9,921 lb* (4 500 kg)*	9,921 lb* (4 500 kg)*
+20 ft (6 m)											18,938 lb* (8 590 kg)*	18,938 lb* (8 590 kg)*	16,976 lb* (7 700 kg)*	14,793 lb* (6 710 kg)*			37 ft 10 in (11.56 m)	9,899 lb* (4 490 kg)*	9,899 lb* (4 490 kg)*
+15 ft (4.5 m)							25,265 lb* (11 460 kg)*	25,265 lb* (11 460 kg)*	23,104 lb* (10 480 kg)*	23,104 lb* (10 480 kg)*	20,128 lb* (9 130 kg)*	18,872 lb* (8 560 kg)*	18,012 lb* (8 170 kg)*	14,374 lb* (6 520 kg)*			39 ft 1 in (11.91 m)	10,097 lb* (4 580 kg)*	10,097 lb* (4 580 kg)*
+10 ft (3 m)			34,590 lb* (15 690 kg)*	34,590 lb* (15 690 kg)*	45,680 lb* (20 720 kg)*	45,680 lb* (20 720 kg)*	32,937 lb* (14 940 kg)*	32,937 lb* (14 940 kg)*	26,147 lb* (11 860 kg)*	24,251 lb* (11 000 kg)*	22,046 lb* (10 000 kg)*	18,078 lb* (8 200 kg)*	19,136 lb* (8 680 kg)*	13,911 lb* (6 310 kg)*	11,244 lb* (5 100 kg)*	10,869 lb* (4 930 kg)*	39 ft 6 in (12.05 m)	10,494 lb* (4 760 kg)*	10,494 lb* (4 760 kg)*
+5 ft (1.5 m)			16,843 lb* (7 640 kg)*	16,843 lb* (7 640 kg)*	50,508 lb* (22 910 kg)*	50,111 lb* (22 730 kg)*	37,104 lb* (16 830 kg)*	32,320 lb* (14 660 kg)*	28,704 lb* (13 020 kg)*	23,016 lb* (10 440 kg)*	23,567 lb* (10 690 kg)*	17,306 lb* (7 850 kg)*	19,996 lb* (9 070 kg)*	13,448 lb* (6 100 kg)*			39 ft 4 in (11.98 m)	11,177 lb* (5 070 kg)*	10,670 lb* (4 840 kg)*
Groundline			23,193 lb* (10 520 kg)*	23,193 lb* (10 520 kg)*	53,175 lb* (24 120 kg)*	47,708 lb* (21 640 kg)*	39,198 lb* (17 780 kg)*	30,776 lb* (13 960 kg)*	30,203 lb* (13 700 kg)*	22,046 lb* (10 000 kg)*	24,427 lb* (11 080 kg)*	16,689 lb* (7 570 kg)*	20,305 lb* (9 210 kg)*	13,073 lb* (5 930 kg)*			38 ft 5 in (11.7 m)	12,236 lb* (5 550 kg)*	10,957 lb* (4 970 kg)*
-5 ft (-1.5 m)	22,134 lb* (10 040 kg)*	22,134 lb* (10 040 kg)*	31,416 lb* (14 250 kg)*	31,416 lb* (14 250 kg)*	53,727 lb* (24 370 kg)*	46,936 lb* (21 290 kg)*	39,220 lb* (17 790 kg)*	30,005 lb* (13 610 kg)*	30,358 lb* (13 770 kg)*	21,473 lb* (9 740 kg)*	24,405 lb* (11 070 kg)*	16,336 lb* (7 410 kg)*	19,930 lb* (9 040 kg)*	12,919 lb* (5 860 kg)*			36 ft 9 in (11.21 m)	13,801 lb* (6 260 kg)*	11,707 lb* (5 310 kg)*
-10 ft (-3 m)	32,298 lb* (14 650 kg)*	32,298 lb* (14 650 kg)*	41,447 lb* (18 800 kg)*	41,447 lb* (18 800 kg)*	51,346 lb* (23 290 kg)*	47,510 lb* (21 550 kg)*	38,096 lb* (17 280 kg)*	30,027 lb* (13 620 kg)*	29,542 lb* (13 400 kg)*	21,451 lb* (9 730 kg)*	23,413 lb* (10 620 kg)*	16,380 lb* (7 430 kg)*					34 ft 3 in (10.46 m)	16,314 lb* (7 400 kg)*	13,095 lb* (5 940 kg)*
-15 ft (-4.5 m)	41,910 lb* (19 010 kg)*	41,910 lb* (19 010 kg)*	56,019 lb* (25 410 kg)*	56,019 lb* (25 410 kg)*	46,032 lb* (20 880 kg)*	46,032 lb* (20 880 kg)*	34,767 lb* (15 770 kg)*	30,512 lb* (13 840 kg)*	26,852 lb* (12 180 kg)*	21,848 lb* (9 910 kg)*	20,150 lb* (9 140 kg)*	16,865 lb* (7 650 kg)*					30 ft 9 in (9.42 m)	17,571 lb* (7 970 kg)*	15,565 lb* (7 060 kg)*
-20 ft (-6 m)			50,023 lb* (22 690 kg)*	50,023 lb* (22 690 kg)*	37,016 lb* (16 790 kg)*	37,016 lb* (16 790 kg)*	28,087 lb* (12 740 kg)*	28,087 lb* (12 740 kg)*	20,371 lb* (9 240 kg)*	20,371 lb* (9 240 kg)*							25 ft 10 in (7.98 m)	16,645 lb* (7 550 kg)*	16,645 lb* (7 550 kg)*

NOTE: *Following number indicates hydraulic capacity

STANDARD EQUIPMENT

ENGINE

Isuzu AQ-6UZ1X
Tier 4 Final Certified
Selective Catalytic Reduction – SCR
Diesel Oxidation Catalyst – DOC
Cooled Exhaust Gas Recirculation – CEGR
EGR Coolers
Six-cylinder turbo-charged diesel
VGT turbocharger
Electronic fuel injection
High pressure common rail system
Neutral safety start
Auto-engine warm up
Glow-plug pre-heat
Fuel Economy Assist System – FEA
Engine Protection Feature – EPF
Dual-stage fuel filtration
Dual element air filter
Remote oil filter
Drain for fuel tank
Remote engine oil drain
500-hour engine oil change interval
24 Volt system
Engine oil sample port
Battery disconnect switch
Air pre-cleaner – Cyclone
High ambient temperature cooling package
Emergency engine stop
External Fuel and DEF gauges
Fan housing
Fuel cooler
Fuel filter restriction indicator
Fuel shut-off valve
Idle start
Radiator, oil cooler, intercooler – protective screen

FUEL ECONOMY SYSTEMS

Engine Idle/Fuel Economy System:
Auto-idle
One-touch idle
Auto-idle shut-down
BEC – Boom Economy Control
AEC – Auto Economy Control
SWC – Swing Relief Control
SSC – Spool Stroke Control

HYDRAULICS

Auto power boost
Auto swing priority
Arm speed assistance – 2 pump flow
Auxiliary flow control
Auxiliary valve
Boom speed assistance – 2 pump flow
Bucket curl assist
Control levers pre-wired for auxiliary hydraulics
Electronically controlled hydraulic pumps
Holding valve – Boom and Arm
Fire wall
Hydraulic filter restriction indicator
Neutral pump de-stroke
Oil cooler

Power save
Pump stand-by pressure
Auto travel speed change
Selectable work modes
Free swing
Hydraulic oil sample port
Control pattern selector
Pre-set auxiliary pump settings
Auxiliary valve
5,000-hour hydraulic oil change interval
1,000-hour hydraulic filter change interval
SAHR brake

UPPER STRUCTURE

ISO mirrors – 3
Viscous Cab mounts – fluid and spring
Upper mounted work light – 70 watt
Swivel guard belly pan
Center cover – over main CV
Fuel tank belly pan
Handrail – RH access
ISO guard rails
Lifting eyes for counterweight
Lockable fuel cap, service doors and toolbox

ATTACHMENTS

Boom – 22 ft 11 in (6.98 m)
Arm – 11 ft 1 in (3.38 m)
Heavy-duty bucket linkage
Boom mounted work light – 70 watt
Auxiliary pipe brackets
Centralized grease fittings
Attachment cushion valve
Arm and boom regeneration
Bucket anti-clatter device
Chrome pins
Easy Maintenance System (EMS) bushings
Teardrop pin retention keepers

OPERATOR ENVIRONMENT

ROPS protection
FOPS cab top guard – Level 1
Pressurized cab
Face vent
Cab lights – 2
Interior dome light
One-touch lock front window
One piece window – right
Safety glass windows
Gate lock hydraulic activation
Emergency exit and hammer
Clear polycarbonate roof window with sunshade
AC/heat/defrost with auto climate control
LED Color monitor – 7 in (180 mm)
26 selectable languages for monitor
On-board diagnostic system
10 programmable attachments settings on monitor – 5 single flow, 5 dual flow
Seat belt – 3 in (76 mm)
Heated high-back cloth seat with air suspension and 65° tilt adjustment
Sliding seat – 3.54 in (90 mm)

Adjustable armrests
Tilting consoles – 4-position
Sliding cockpit – 3.15 in (80 mm)
Low-effort joystick controls
Controls pre-wired for auxiliary
Single pedal travel
Straight travel
AM/FM radio with antenna, 2 speakers and Bluetooth capabilities
Aux-in port for personal electronics
Radio mute switch – joystick
Rear-view camera
Anti-theft system – start code system
Rubber floor mat
12 Volt electric outlet
24 Volt cigarette lighter
Windshield wiper/washer
Cup holder
Storage compartments
Warm/cool storage compartment
Travel alarm with cancel switch
Ignition keys
One key start & lock-up
Cab filter – external
Cab handrails
Operator's manual

UNDERCARRIAGE

Long undercarriage
35.4 in (900 mm) steel shoes, triple semi-grouser
Full overlap turntable bearing tub
Double track chain guides
Hydraulic track adjustment
Sealed link chain
Steps
Carbody belly pan – swivel guard
X-pattern carbody
Lashing points – tie downs
Extra Filter Kit:
Engine oil filter
Filter wrench
Fuel filters
Green plug oil drain hose for engine oil drain
Hydraulic return filter
Pilot circuit hydraulic filter

TELEMATICS

CASE SiteWatch™ Telematics – includes hardware and a 3-yr Advanced data subscription

OPTIONAL EQUIPMENT

ENGINE

Refueling pump

HYDRAULICS

Auxiliary hydraulics:

Single acting/joystick activated

Double acting/joystick activated – thumb

Multi-function with electronic pressure control/joystick activated with electronic proportional controls

Secondary low-flow/joystick activated

Proportional hydraulic controls

Hose Burst Check Valve – HBCV

Hydraulic CWT Removal Device

ATTACHMENTS

Heavy-duty arm – 8 ft 3 in (2.53 m)

Arm – 13 ft 2 in (4.00 m)

Arm – 15 ft 11 in (4.85 m)

Tools:

Heavy-duty/Extreme-duty/Ditching

Buckets; Hammers; Thumbs;

Compaction plates.

Load holding control

UPPER STRUCTURE

Rubber bumper guard – order through

Service Parts

Catwalk – left and right side

UNDERCARRIAGE

29.5 in (750 mm) steel shoes,
triple semi-grouser

Full Length Track Chain Guards

OPERATOR ENVIRONMENT

FOPS cab top guard – Level 2

Front grill guard – 2 x 2 in (50.8 x 50.8 mm)
screen mesh

Front rock guard – vertical bars

Two piece/OPG 1

Front rock guard – vertical bars

One piece/OPG 2

Vandal guard (front window) with
common key

Rain deflector – not available with
Front guards

Sun visor

Side-view camera

LED Package:

Includes 1 Side view camera and 6 LED

Lights – 2 front cab mounted, 2 rear

mounted and 1 mounted on each side

CaseCE.com

©2018 CNH Industrial America LLC. All rights reserved. CASE is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. CNH Industrial Capital is a trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Printed in U.S.A. Contains 10% post-consumer fiber.

IMPORTANT: CASE Construction Equipment Inc. reserves the right to change these specifications without notice and without incurring any obligation relating to such change. Availability of some models and equipment builds vary according to the country in which the equipment is used. The illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your CASE dealer/distributor will be able to give you details of the products and their specifications available in your area.



CASE Construction Equipment is biodiesel-friendly. NOTE: All engines meet current EPA emissions regulations. All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.



Always read the Operator's Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs and use any safety features provided.

Form No. CCE201807CX490D
Replaces Form No. CCE201511CX490D

CX490D

8 of 8