




K-TEC 1228

The K-Tec 1228 is a fast-loading, light-weight earthmover, making it one of K-Tec's most popular models. The solid-welded, rigid-frame 1228 scraper has a heaped capacity of 28 cubic yards / 21.4 cubic metres. The 1228 has proven results in all conditions, including proficiency in low ground pressure or sandy soil



K-TEC 1228 SCRAPER FEATURES

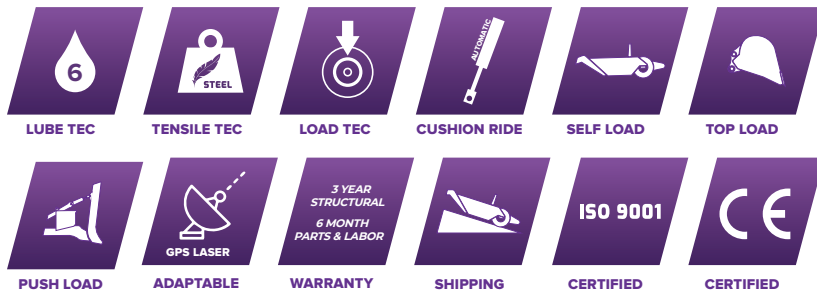

1228 SPECIFICATIONS

General Specifications	Standard	Metric
Heaped Capacity (ISO)	28 Cubic Yards	21.4 Cubic Metres
Struck Capacity	18.5 Cubic Yards	14.1 Cubic Metres
Max Loading Rating	68,000 lbs	30,844 kgs
Bucket Dimensions	12' W x 4' H x 11' L	3.66m W x 1.22m H x 3.35m L
Cutting Width	12'	3.66m
Cutting Edge	3-Piece Blade	3-Piece Blade
Gate Opening	6' 6"	1.98m
Turning Radius	26'	7.92m
Gate Cylinders	4.5" x 26.5"	114mm x 673mm
Lift Cylinders	5.5" x 32"	140mm x 813mm
Ejector Cylinder	5.5" x 76"	140mm x 1,930mm
Cutting Edge Clearance	28"	0.71m
Hitch Pin to Rear Axle Length	30'	8.38m
Rack Height (Tilttable)	3'	0.91m
Weight Distribution	Tongue: 24%, Wheels: 76%	Tongue: 24%, Wheels: 76%
4 Tires	23.5 R25 Radial	23.5 R25 Radial
Horsepower Required	300HP +	220 kW +
Wrap Around Mud Scrapers	Standard	Standard


Transport Dimensions	Standard	Metric
Overall Width	14'	4.27m
Overall Height	8' 10"	2.68m
Overall Length	36' 7"	11.15m
Shipping Weight	29,550 lbs	13,403 kgs
Overseas Shipping	Roll-on Roll-off	Roll-on Roll-off

Optional Upgrades	
Radial Tires (4)	1000/50 R25, 1050/50 R32 (2)
Brake System	4 or 8 Caliper Disc System
Rack Extension	


Specifications are subject to change without notice.



RECOMMENDED POWER UNITS



Agricultural Tractor
300HP+ / 220KW+



Dozer
230-350HP+ / 171-260KW+



Construction Tractor
400HP+ / 298KW+